

AIL /E LED

LED BATTENS AND TRUNKING SYSTEMS



Norms
EN 60598-1, EN 60598-2-2



Body: Steel sheet.

Finish: Powder coated in white matt (RAL9016).

Diffuser: Opal PMMA diffuser.

Light source: LED 4000K, CRI >80, 50.000h life.

Wiring: Monophasic.

Control Gear: LED driver, 220-240VAC-50/60Hz.

Fixing system: Brackets.

ACM - Symmetric reflector with opal diffuser


LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	B ₁ (mm)	Beam angle	Kg	K1 K3	HF	DALI
1x19	2730	106	83	614x149x107	128	594x130	2,3	- -	9Z2Z.119.6Y.F4	9Z2Z.119.6Y.E4	
1x39	5460	108	85	1174x149x107	128	1154x130	4,4	- -	9Z2Z.139.6Y.F4	9Z2Z.139.6Y.E4	
1x58	8190	108	85	1734x149x107	128	1714x130	6,4	• •	9Z2Z.158.6Y.F4	9Z2Z.158.6Y.E4	

AWM - Asymmetric reflector with opal diffuser

LED	W	Lm	Lm/W	η(%)	AxBxC (mm)	B ₁ (mm)	Beam angle	Kg	K1 K3	HF	DALI
1x19	2730	103	81	602x149x107	128	590x137	2,4	- -	9Z2Z.119.8C.F4	9Z2Z.119.8C.E4	
1x39	5460	102	80	1162x149x107	128	1150x137	4,5	- -	9Z2Z.139.8C.F4	9Z2Z.139.8C.E4	
1x58	8190	101	79	1722x149x107	128	1710x137	6,5	• •	9Z2Z.158.8C.F4	9Z2Z.158.8C.E4	

OPTIONS

Colour temperature



3000K

Order code
3000

Emergency unit



Emergency unit 3 hours
Emergency unit 1 hour

• Only available for 58w version.

Order code
K3
K1

DETAILS



Asymmetric detail



LED detail



Bracket detail



FOSFARI
LIGHTING

info@fosfari.be

www.fosfari.be


T +(32) 15 51 85 34



TO SPECIFY:

Recessed single mounted LED luminaire with symmetric/asymmetric version and opal PMMA diffuser. Total luminous flux of 2730/5460/8190 lm version and integral HF/DALI LED driver. Optional 1 or 3 hours emergency available - as Roxo Lighting AIL/E LED.

PHOTOMETRY

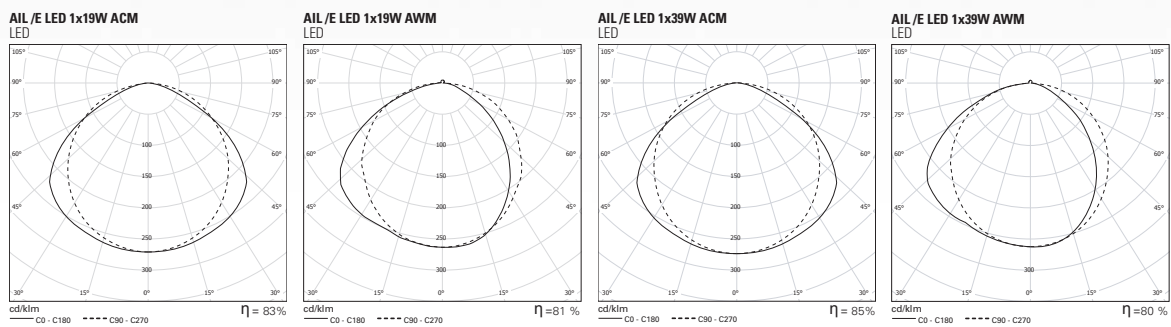

DIMENSIONS

