

DYNA IP

DOWNLIGHTS

Norms
EN 60598-1, EN 60598-2-2



Body: Die cast aluminium.
Finish: Powder coated.
Diffuser: Transparent tempered glass.
Light Source: TC-DEL (G24q-2/G24q-3) lamp or TC-TEL (GX24q-3/GX24q-4) lamp.
Control Gear: Electronic equipment 220-240VAC-50/60Hz.



PB - Polished aluminium reflector

LAMP*	UGR		W	η(%)	AxB (mm)	⌀	Kg	HF	DSI	DALI
TC-DEL	≤19	G24q-2	1x18	73	Ø236x144	Ø215	1,4	90015.E118.A	90015.E118.C	90015.E118.D
	≤19	G24q-3	1x26	67	Ø236x144	Ø215	1,4	90015.F126.A	90015.F126.C	90015.F126.D
	≤19	G24q-2	2x18	65	Ø236x144	Ø215	1,5	90015.E218.A	90015.E218.C	90015.E218.D
	≤22	G24q-3	2x26	56	Ø236x144	Ø215	1,5	90015.F226.A	90015.F226.C	90015.F226.D
TC-TEL	≤22	GX24q-3	1x32	63	Ø236x144	Ø215	1,5	90015.I132.A	90015.I132.C	90015.I132.D
	≤22	GX24q-4	1x42	64	Ø236x144	Ø215	1,5	90015.J142.A	90015.J142.C	90015.J142.D
	≤22	GX24q-3	2x32	51	Ø236x144	Ø215	1,6	90015.I232.A	90015.I232.C	90015.I232.D
	≤22	GX24q-4	2x42	44	Ø236x144	Ø215	1,6	90015.J242.A	90015.J242.C	90015.J242.D


COLOUR/FINISH




OPTIONS




DETAILS



PHOTOMETRY

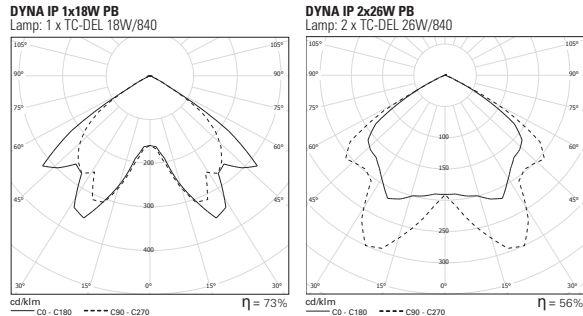

DIMENSIONS



TO SPECIFY:

Recessed round single/twin lamp 18/26W TC-DEL or 32/42W TC-TEL compact fluorescent downlight. Die cast aluminium bezel with transparent tempered glass and polished aluminium reflector. Optional class II, decorative/opal tempered glass and 1 or 3 hours emergency available. For ceiling thicknesses of 1-20mm – as Roxo Lighting DYNA IP.