

LEAN

DOWNLIGHTS

Norms
EN 60598-1, EN 60598-2-2




Body: Steel sheet.
Finish: Powder coated.
Light Source: TC-TEL (GX24q-2)
or (GX24q-3) lamp.
Control Gear: Electronic equipment
220-240VAC-50/60Hz.



PB - Polished aluminium reflector | 90° Beam angle

LAMP*	UGR		W	η (%)	AxBxC (mm)		Kg	HF	DSI	DALI
TC-TEL	≤19	GX24q-2	1x18	77	175x175x98	162x155	0,77	90018.H118.A	90018.H118.C	90018.H118.D
	≤22	GX24q-3	1x26	69	175x175x98	162x155	0,77	90018.I126.A	90018.I126.C	90018.I126.D
	≤22	GX24q-2	2x18	65	175x175x98	162x155	0,81	90018.H218.A	90018.H218.C	90018.H218.D
	≤22	GX24q-3	2x26	53	175x175x98	162x155	0,81	90018.I226.A	90018.I226.C	90018.I226.D

COLOUR/FINISH



OPTIONS



Emergency unit
3 hours on page 430


Lamps as optional

DETAILS




Ballast detail

PHOTOMETRY

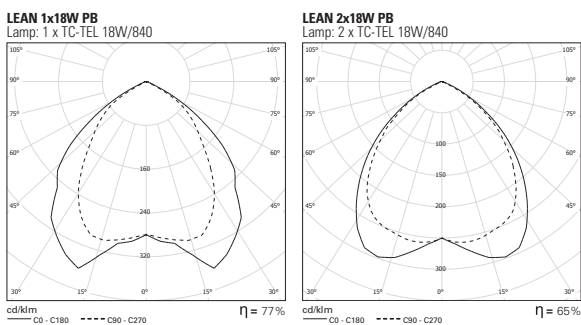

DIMENSIONS



TO SPECIFY:

Recessed square single/twin 18/26W TC-TEL compact fluorescent downlight with steel sheet body and aluminium reflector. For ceiling thicknesses of 1-25mm – as Roxo Lighting LEAN.