

# SPA

## DOWNLIGHTS

Norms  
EN 60598-1, EN 60598-2-1



**Body:** Extruded aluminium profile.  
**Finish:** Powder coated.  
**Diffuser:** Opal polycarbonate.  
**Light Source:** T5 (G5) lamp.  
**Control Gear:** Electronic equipment, 220-240VAC-50/60Hz.



### DOP - Opal polycarbonate diffuser

	LAMP*	W	Lm/W	η(%)	AxBxC (mm)	Kg	K1   K3	HF	DALI
	T5	2x21	67	81	915x300x88	10	- -	90090.P221.A	90090.P221.D
		2x28	56	75	1215x300x88	10,3	• •	90090.P228.A	90090.P228.D
		2x35	61	71	1515x300x88	11,3	• •	90090.P235.A	90090.P235.D
		2x39	52	66	915x300x88	10	- -	90090.P239.A	90090.P239.D
		2x49	62	71	1515x300x88	11,3	• •	90090.P249.A	90090.P249.D
		2x54	59	73	1215x300x88	10,3	• •	90090.P254.A	90090.P254.D
		4x14	52	67	615x615x88	9,9	- -	90090.P414.A	90090.P414.D

### COLOUR/FINISH



### OPTIONS



Suspension type "I" (x4)



Suspension type "Y" (x2)



1,5 m transparent current cable 3x0,75 mm<sup>2</sup>



1,5 m transparent current cable 5x0,75 mm<sup>2</sup>



1,5 m transparent current cable 7x0,75 mm<sup>2</sup>



Emergency unit 3 hours



Emergency unit 1 hour




Ceiling rose



Lamps as optional

### DIMENSIONS

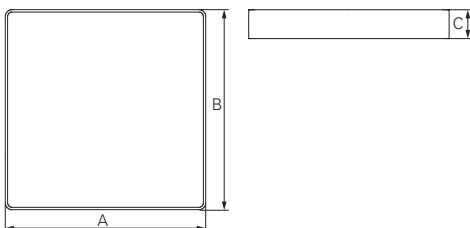

### TO SPECIFY:

Surface mounted or suspended T5(G5) luminaire. Opal polycarbonate diffuser and aluminium body with round corners. Available in four sizes. Optional dimmable versions – as Roxo Lighting SPA.