

TEA

TECHNICAL LIGHTING

Norms

EN 60598-1, EN 60598-2-2




Body: Steel sheet.

Finish: Powder coated in white matt (RAL9016).

Control Gear: Electronic equipment, 220-240VAC-50/60Hz.



RAM - Asymmetric satin aluminium reflector


LAMP*	W	AxBxC (mm)	f	HF	DSI	DALI
 T5	1x14	597x100x56	580x85	9A50.114.0C.A4	9A50.114.0C.84	9A50.114.0C.74
	1x24	597x100x56	580x85	9A50.124.0C.A4	9A50.124.0C.84	9A50.124.0C.74
	1x28	1197x100x56	1180x85	9A50.128.0C.A4	9A50.128.0C.84	9A50.128.0C.74
	1x35	1497x100x56	1480x85	9A50.135.0C.A4	9A50.135.0C.84	9A50.135.0C.74
	1x49	1497x100x56	1480x85	9A50.149.0C.A4	9A50.149.0C.84	9A50.149.0C.74
	1x54	1197x100x56	1180x85	9A50.154.0C.A4	9A50.154.0C.84	9A50.154.0C.74
	1x80	1497x100x56	1480x85	9A50.180.0C.A4	9A50.180.0C.84	9A50.180.0C.74

OPTIONS




Lamps as optional

PHOTOMETRY

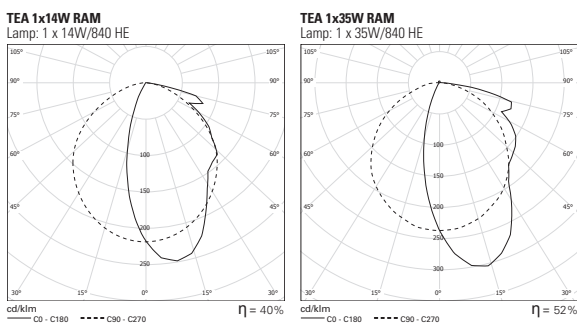

DIMENSIONS

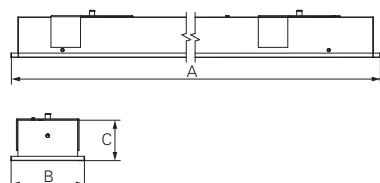

TO SPECIFY:

Recessed asymmetric luminaire individually mounted with satin aluminium reflector. For single fluorescent 14/24/28/35/49/54/80W T5(G5) lamp. Suitable for pull up version with brackets – as Roxo Lighting TEA.