

TEA Line

TECHNICAL LIGHTING

Norms
EN 60598-1, EN 60598-2-2



Body: Steel sheet.
Finish: Powder coated in white matt (RAL9016).
Control Gear: Electronic equipment, 220-240VAC-50/60Hz.



RAM - Asymmetric satin aluminium reflector (middle)

LAMP*	W	AxBxC (mm)		HF	DSI	DALI
T5	1x14	576x100x56	576x85	9A5P.114.0C.A4	9A5P.114.0C.84	9A5P.114.0C.74
	1x24	576x100x56	576x85	9A5P.124.0C.A4	9A5P.124.0C.84	9A5P.124.0C.74
	1x28	1176x100x56	1176x85	9A5P.128.0C.A4	9A5P.128.0C.84	9A5P.128.0C.74
	1x35	1476x100x56	1476x85	9A5P.135.0C.A4	9A5P.135.0C.84	9A5P.135.0C.74
	1x49	1476x100x56	1502x85	9A5P.149.0C.A4	9A5P.149.0C.84	9A5P.149.0C.74
	1x54	1176x100x56	1202x85	9A5P.154.0C.A4	9A5P.154.0C.84	9A5P.154.0C.74
	1x80	1476x100x56	1502x85	9A5P.180.0C.A4	9A5P.180.0C.84	9A5P.180.0C.74

Please note:
To complete a line, start kit will be necessary. Please order separately.
Recessed dimensions without end caps, add 14 mm to complete the line. 14/24 W version only available as part of the line.

OPTIONS

Start Kit



Start Kit
• 2 end caps and one cable lock, includes screws.

Order code
920100

Through-wiring



1,5 mm² through-wiring
3 x 1,5 mm²
5 x 1,5 mm²
2,5 mm² through-wiring
3 x 2,5 mm²
5 x 2,5 mm²

Order code


9462
9467
9464
9465

Lamps as optional



Please note:
This option can be supplied on request.

DIMENSIONS

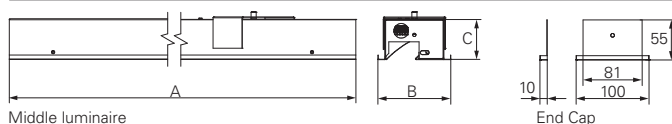

TO SPECIFY:

Recessed asymmetric luminaire for continuous line with satin aluminium reflector. For single fluorescent 14/24/28/35/49/54/80W T5(G5) lamp. Suitable for pull up version with brackets – as Roxo Lighting TEA Line.