

# TLP

VANDAL RESISTANT


Norms  
EN 60598-1 , EN 60598-2-1

CE  IP65 IK10  850°C  230V/50Hz


Body: Steel sheet.  
Diffuser: 3mm polycarbonate.  
Finish: Powder coated in white matt (RAL9016).  
Control Gear: Electronic equipment,  
220-240VAC-50/60Hz.



## DOP - Opal polycarbonate diffuser

 LAMP	W	AxBxC (mm)	HF	DSI	DALI
T5	2x28	1350x290x66	9LDH.228.21.A4	9LDH.228.21.84	9LDH.228.21.74
	2x35	1650x290x66	9LDH.235.21.A4	9LDH.235.21.84	9LDH.235.21.74
	2x49	1650x590x66	9LDH.249.21.A4	9LDH.249.21.84	9LDH.249.21.74
	2x54	1350x290x66	9LDH.254.21.A4	9LDH.254.21.84	9LDH.254.21.74
	2x80	1650x590x66	9LDH.280.21.A4	9LDH.280.21.84	9LDH.280.21.74
	4x14	750x600x66	9LDH.414.21.A4	9LDH.414.21.84	9LDH.414.21.74
	4x24	750x600x66	9LDH.424.21.A4	9LDH.424.21.84	9LDH.424.21.74

## DPT - Transparent polycarbonate diffuser

 LAMP	W	AxBxC (mm)	HF	DSI	DALI
T5	2x28	1350x290x66	9LDH.228.7Z.A4	9LDH.228.7Z.84	9LDH.228.7Z.74
	2x35	1650x290x66	9LDH.235.7Z.A4	9LDH.235.7Z.84	9LDH.235.7Z.74
	2x49	1650x590x66	9LDH.249.7Z.A4	9LDH.249.7Z.84	9LDH.249.7Z.74
	2x54	1350x290x66	9LDH.254.7Z.A4	9LDH.254.7Z.84	9LDH.254.7Z.74
	2x80	1650x590x66	9LDH.280.7Z.A4	9LDH.280.7Z.84	9LDH.280.7Z.74
	4x14	750x600x66	9LDH.414.7Z.A4	9LDH.414.7Z.84	9LDH.414.7Z.74
	4x24	750x600x66	9LDH.424.7Z.A4	9LDH.424.7Z.84	9LDH.424.7Z.74

## OPTIONS




Emergency unit  
3 hours

Emergency unit  
1 hour

Lamps as optional

## DIMENSIONS

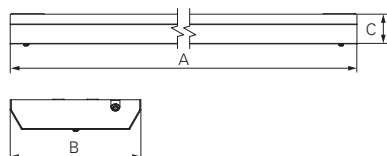

### TO SPECIFY:

Surface mounted IP65 sealed luminaire for fluorescent T5(G5) 28/35/49/54/80W. Aluminium frame with tamperproof screws and transparent or opal polycarbonate diffuser designed to resist extreme physical impact (IK10). Optional 1 or 3 hours emergency – as Roxo Lighting TLP.