

VISA LED


LED DOWNLIGHTS



Norms
EN 60598-1 , EN 60598-2-1

CE IP 20 230V/50Hz

Body: Steel sheet.
Finish: Powder coated.
Light source: LED 5700K,
CRI >80, 50.000h life.
Control Gear: LED driver,
220-240VAC-50/60Hz.

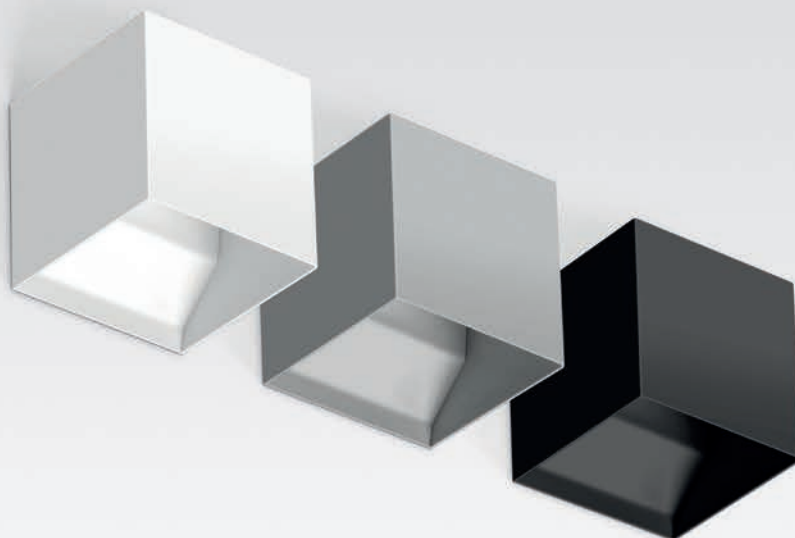

Direct/Indirect 90° + 90° beam angle

LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
	1	101	110x110x110	0,7	90220.L101.E.0090
	3	187	110x110x110	0,7	90220.L103.E.0090


Direct/Indirect 90° + 5° beam angle

LED	W	Lm	AxBxC (mm)	Kg	ORDER CODE
	1	101	110x110x110	0,7	90220.L101.E.0005
	3	187	110x110x110	0,7	90220.L103.E.0005

COLOUR/FINISH



OPTIONS





Colour temperature
3000K

DETAILS



Narrow beam detail

DIMENSIONS



TO SPECIFY:

Wall mounted LED direct/indirect luminaire with different light beam effect on walls. Optional 3000K and white, grey, black, red, yellow, green or blue finish - as Roxo Lighting VISA LED.

