



DEXTER

LIGHTING COLLECTION 2026

THE COLLECTION

TERRACE

MOONLIGHT → pg 4

VALENCIA → pg 6

VECTOR TERRACE → pg 8

BOLLARD

AURORA → pg 10

BENT ZZZ → pg 12

BLADE → pg 14

CUBE POLE → pg 16

EYE → pg 18

EYE SPOT → pg 20

RAY → pg 22

REED → pg 24

SPIKE → pg 26

STILO → pg 28

TORCH → pg 30

TOWER → pg 32

VECTOR POLE → pg 34

WALL

BENT WALL → pg 36

BRICK → pg 38

CUBE → pg 40

CUBE FROSTED → pg 42

EDDY → pg 44

LIV LINEAR → pg 46

NOOR → pg 48

STILO WALL → pg 50

VECTOR PIVOT → pg 52

VECTOR WALL → pg 54

CEILING

CUBE CEILING → pg 56

VECTOR CEILING → pg 58

VECTOR PIVOT → pg 60

IN-GROUND

EOS → pg 62

SELENE → pg 64

ACCESSORIES


MOUNTS → pg 66

DX-CONNECT → pg 68

230V MAINS → pg 70

MATERIALS & COLORS → pg 72



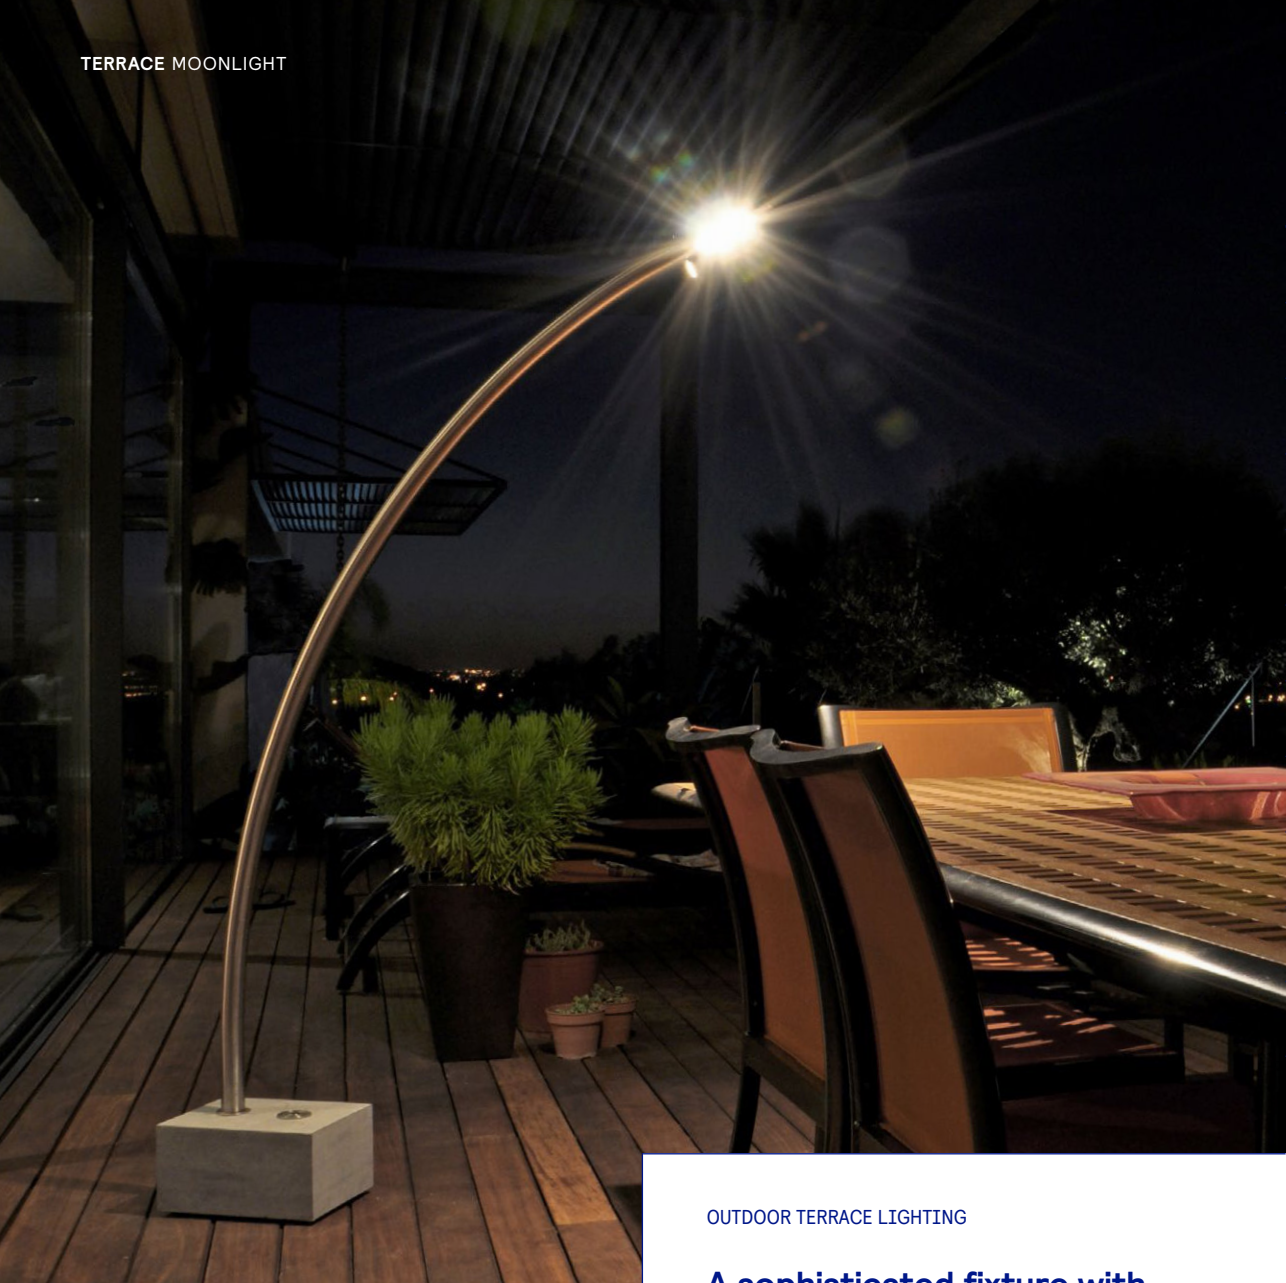

OUTDOOR TERRACE LIGHTING

A sophisticated fixture with adjustable and rotatable lamp capabilities, ideal for both indoor and outdoor use. Its stainless steel frame and sturdy hard stone base ensure durability and suitability for outdoor environments.

moonlight




valencia

OUTDOOR TERRACE LIGHTING

A large outdoor light designed with a long reach to effortlessly illuminate expansive areas. Its design draws inspiration from botanical elements, incorporating cut-outs in the shade to foster an open and airy feel, allowing the internal illumination to be visible from the outside. The interplay of light and shadow produces a striking effect, with brighter colors shining through where the light meets the inner surface.

DESIGN: JOEL EN KATE BOOY / STUDIO TRULY TRULY

SPECIFICATIONS		VALENCIA	
LIGHTSOURCE	LUXEON 3014		
COLOR TEMP.	2700 K		
LUMEN OUTPUT	2350 LM (MAX)		
OPTIC	DIFFUSER		
RATED VOLTAGE	230V 50-60HZ		
DIMMABLE	CASAMBI		
POWER	27 W		
IP CLASS	IP44		
INSULATION CLASS	I		
WEIGHT	25 KG		
CONCRETE BALLAST	35 KG		
CABLE	5 M + EURO PLUG		
ARTICLE NØ.	BLACK	OLIVE GREEN	
VALENCIA	2211	2210	

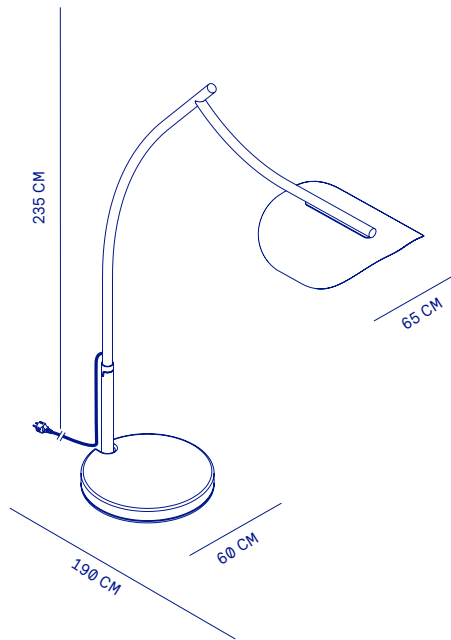

VALENCIA




vector terrace


OUTDOOR TERRACE LIGHTING

A sizable freestanding floor luminaire that adds ample brightness and a touch of style to both outdoor and indoor spaces. It serves as the ideal choice for illuminating terraces, expansive patios, and even hotel lobbies.

SPECIFICATIONS		VECTOR TERRACE	
LIGHTSOURCE	LUXEON COB		
COLOR TEMP.	2700 K		
LUMEN OUTPUT	1400 LM		
OPTIC	25° FROSTED		
RATED VOLTAGE	230V 50-60HZ		
DIMMABLE	TRIAC		
POWER	12 W		
IP CLASS	IP44		
INSULATION CLASS	I		
WEIGHT	18 KG		
CABLE	5 M + EURO PLUG		
ARTICLE NØ.		BLACK	
VECTOR TERRACE		2712	

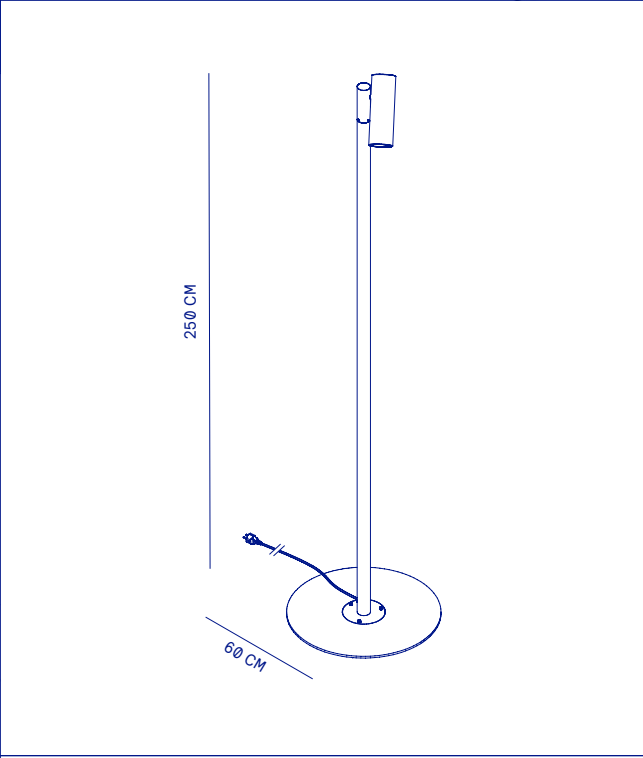

VECTOR TERRACE

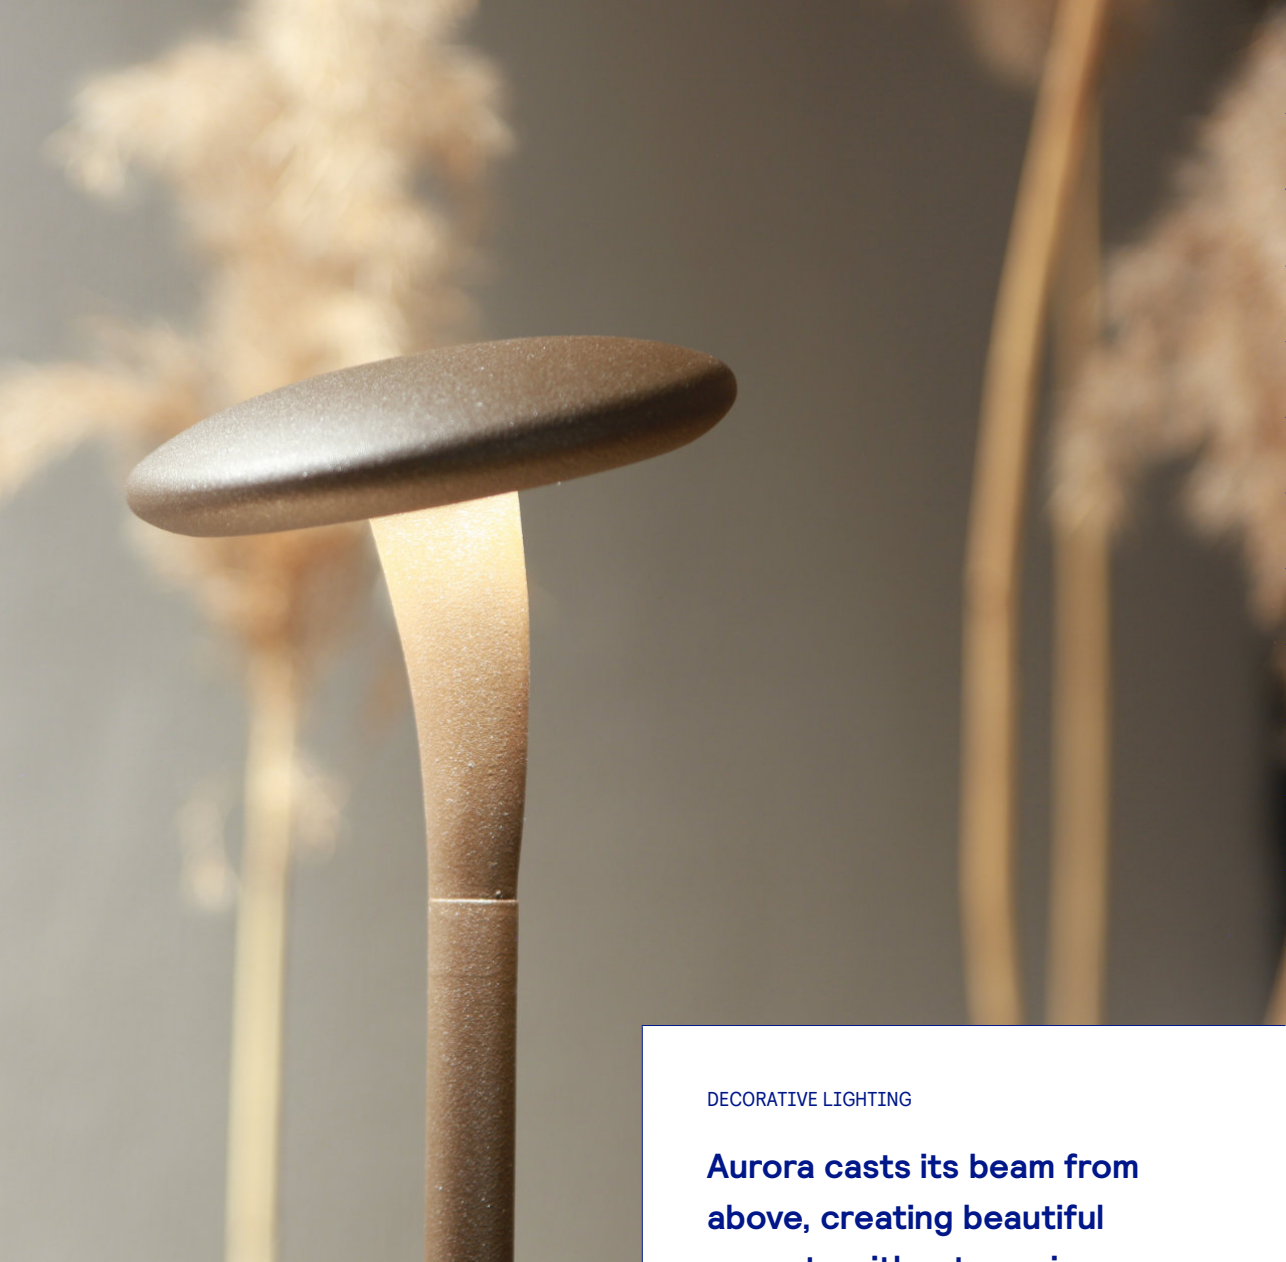


aurora

DECORATIVE LIGHTING

Aurora casts its beam from above, creating beautiful accents without causing glare. Perfect for paths, borders, and garden features. Aurora can be easily placed into the ground using its integrated ground spike. The adjustable height (70–95 cm) allows you to tailor the lighting effect to your specific garden layout and plant heights.

SPECIFICATIONS		AURORA
LIGHTSOURCE		CREE J SERIES 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		260 LM
OPTIC		DIFFUSER
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		2.2 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.

AURORA IRONSTONE 24V

3200

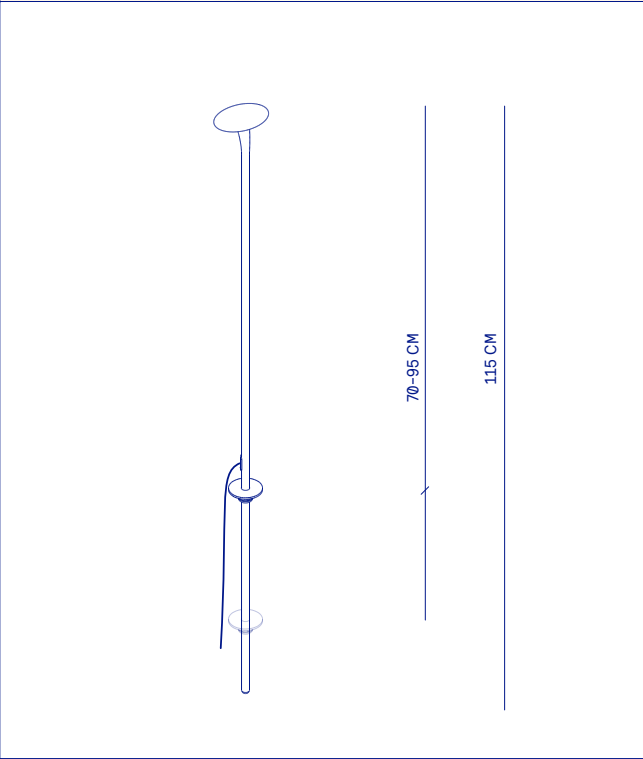

AURORA




DESIGN BOLLARD

An innovative path lighting fixture crafted with elegance and simplicity in mind. This unique bollard is created by folding a single aluminum plate, resulting in a sleek and modern design. Available in a range of two colors, it offers both functionality and aesthetics to illuminate pathways and outdoor spaces.

bent zzz


SPECIFICATIONS		BENT ZZZ
LIGHTSOURCE		CREE 2835
COLOR TEMPERATURE		2700 K
LUMEN OUTPUT		450 LM
OPTIC		DIFFUSER
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		3,6 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE N0.	BLACK	CORTEN
BENT ZZZ 24V	1714	1712
GROUND SPIKE BENT	9016	

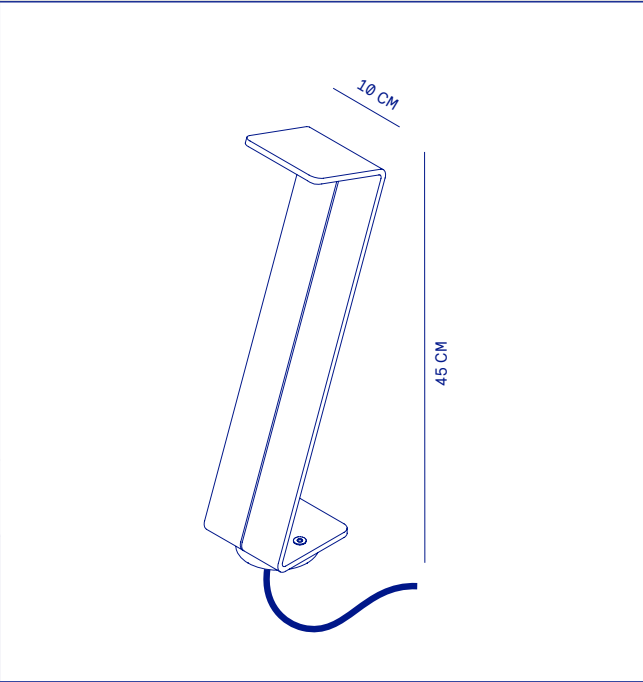

BENT ZZZ

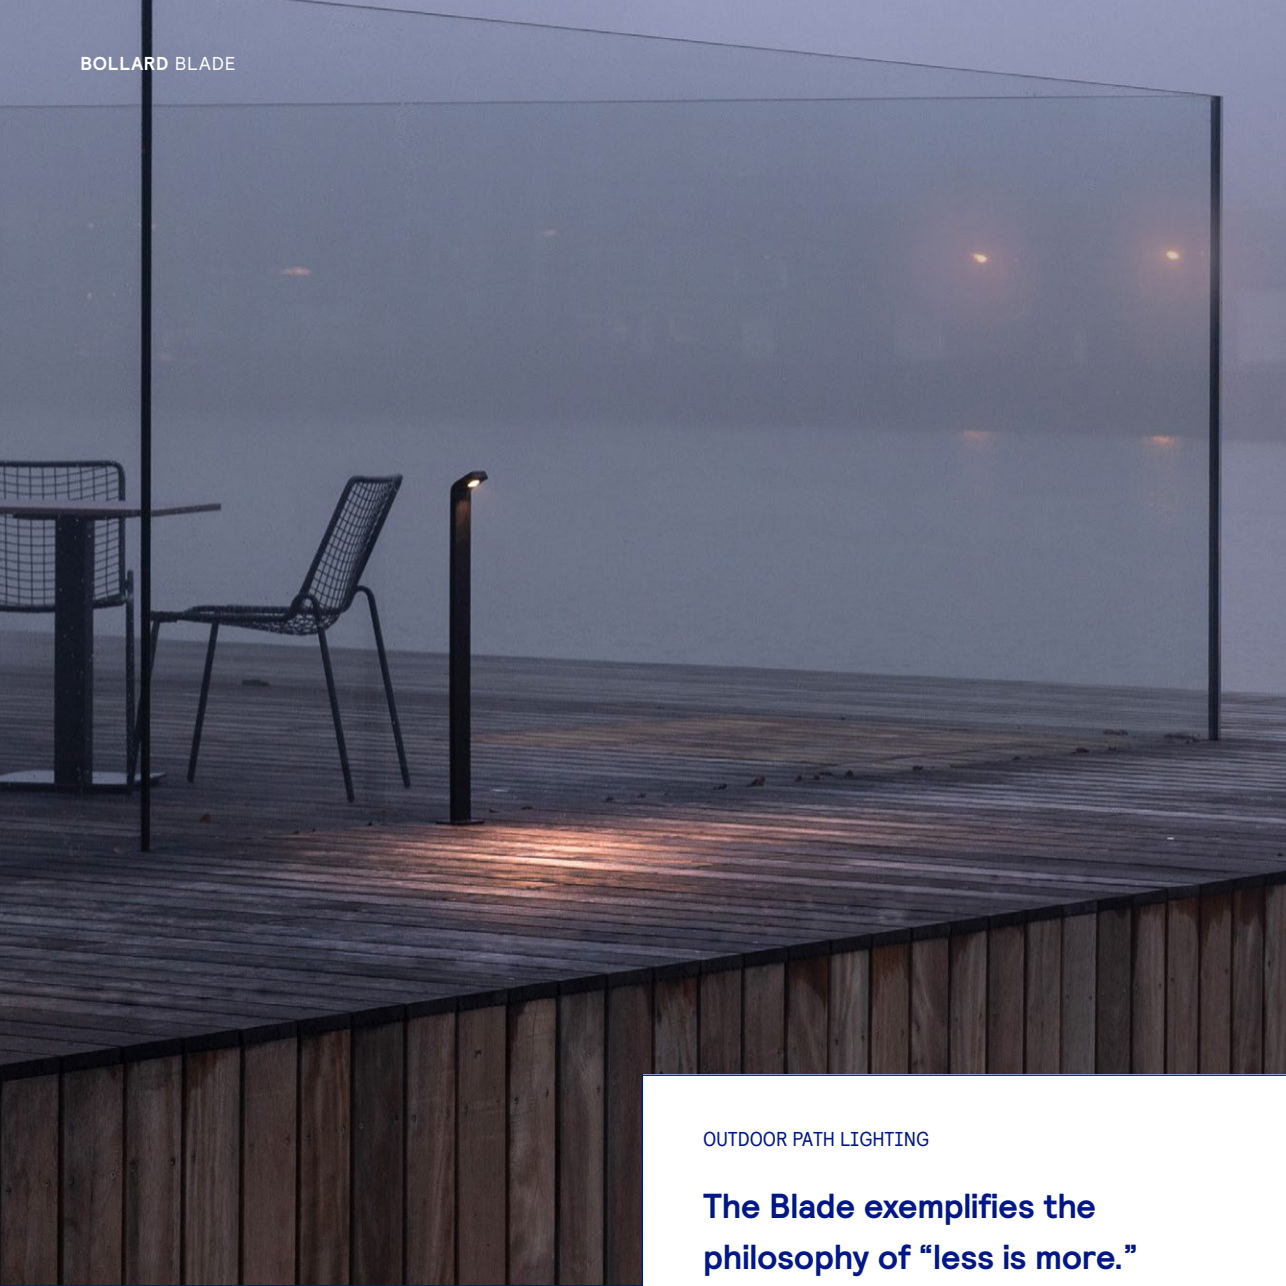

OUTDOOR PATH LIGHTING

The Blade exemplifies the philosophy of “less is more.” Its efficient and glare-free light effect sets it apart. Crafted with a durable stainless steel design and a textured powder coat finish, this fixture is built to last. Available in two colors, including corten.

blade

75 / 90


SPECIFICATIONS		BLADE 75 / 90
LIGHTSOURCE		LUXEON 3014
COLOR TEMPERATURE		2700 K
LUMEN OUTPUT		350 LM
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		5 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)



INSTALLATION


Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN
BLADE 75 24V	1225	1226
BLADE 90 24V	1230	1231
GROUND SPIKE BLADE	9016	

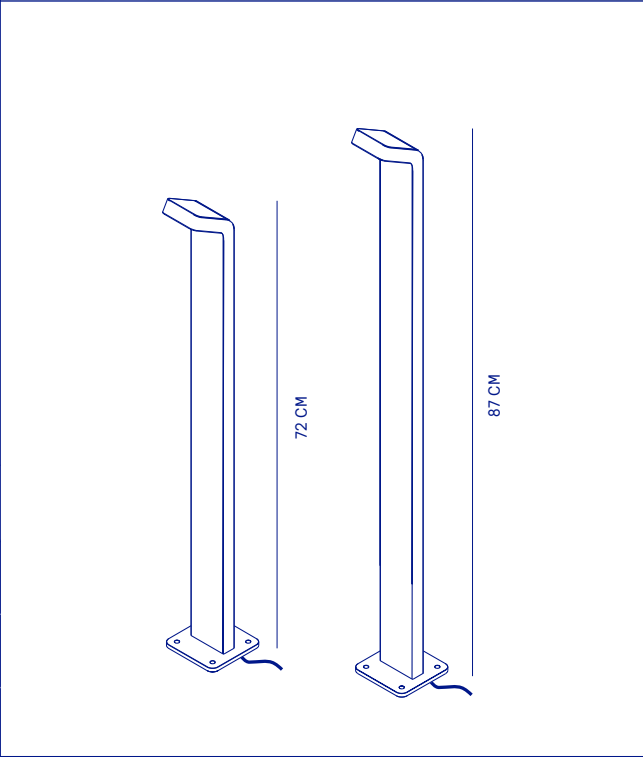

BLADE 75

BLADE 90

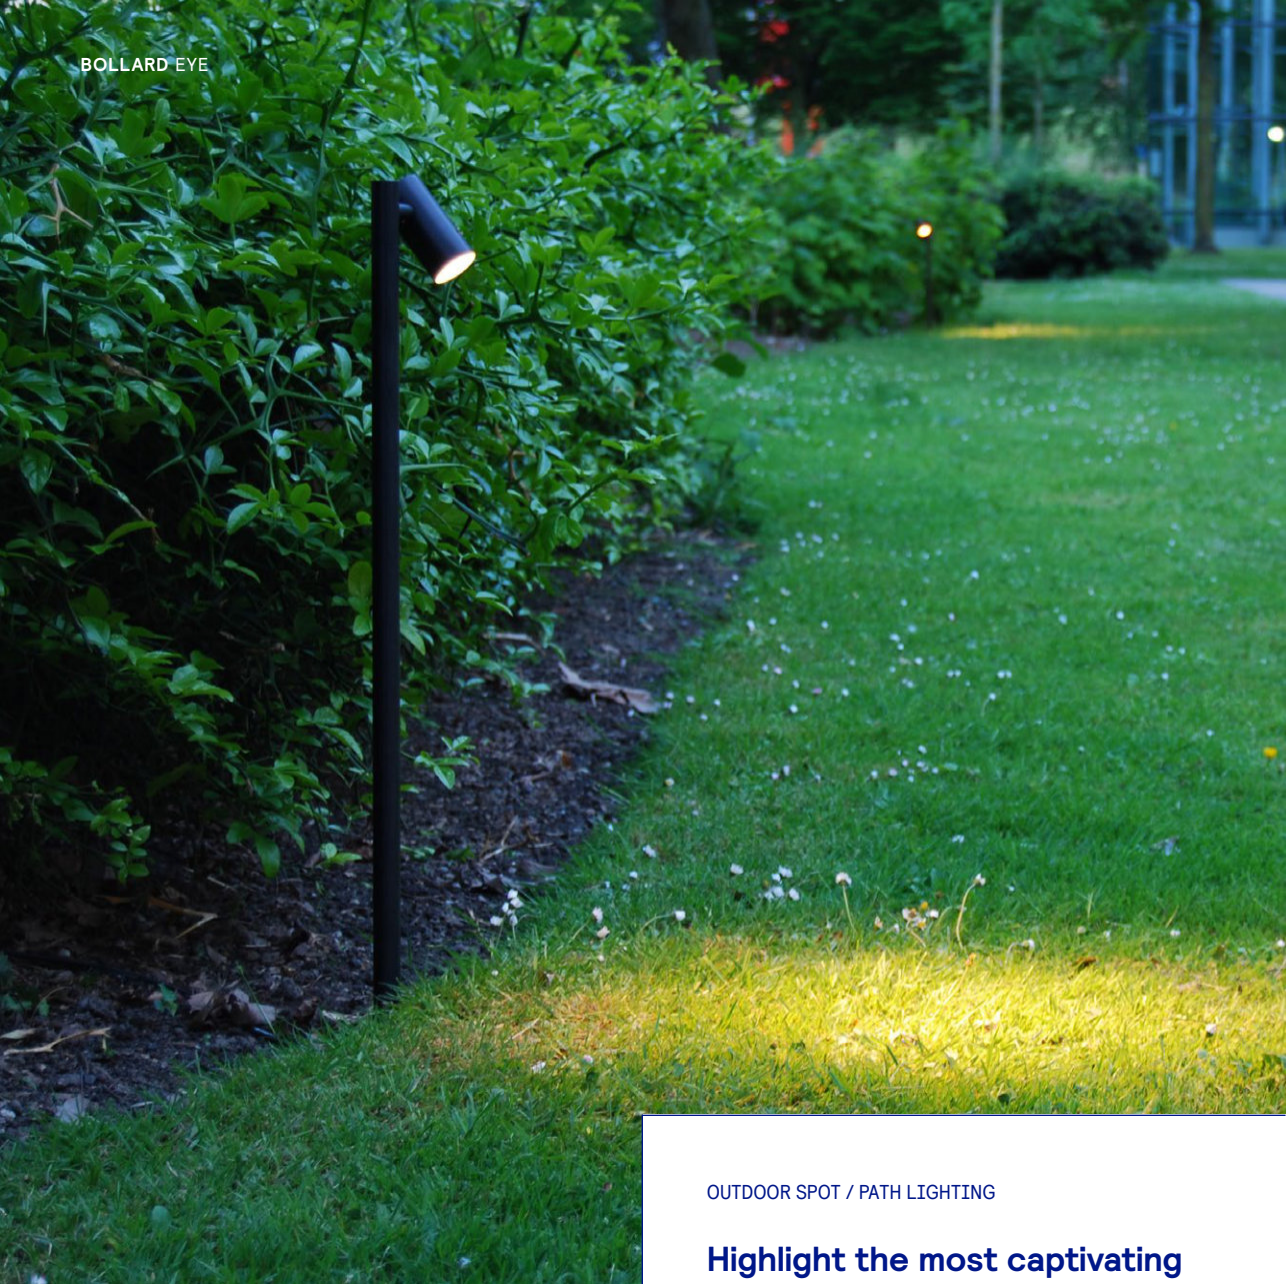


OUTDOOR SPOT / PATH LIGHTING

Highlight the most captivating aspects of your garden with precision. Concentrate on the elements that truly matter. Whether equipped with a single or double spotlight, this lamp is a versatile addition suitable for any garden setting.

eye

eye / eye focus

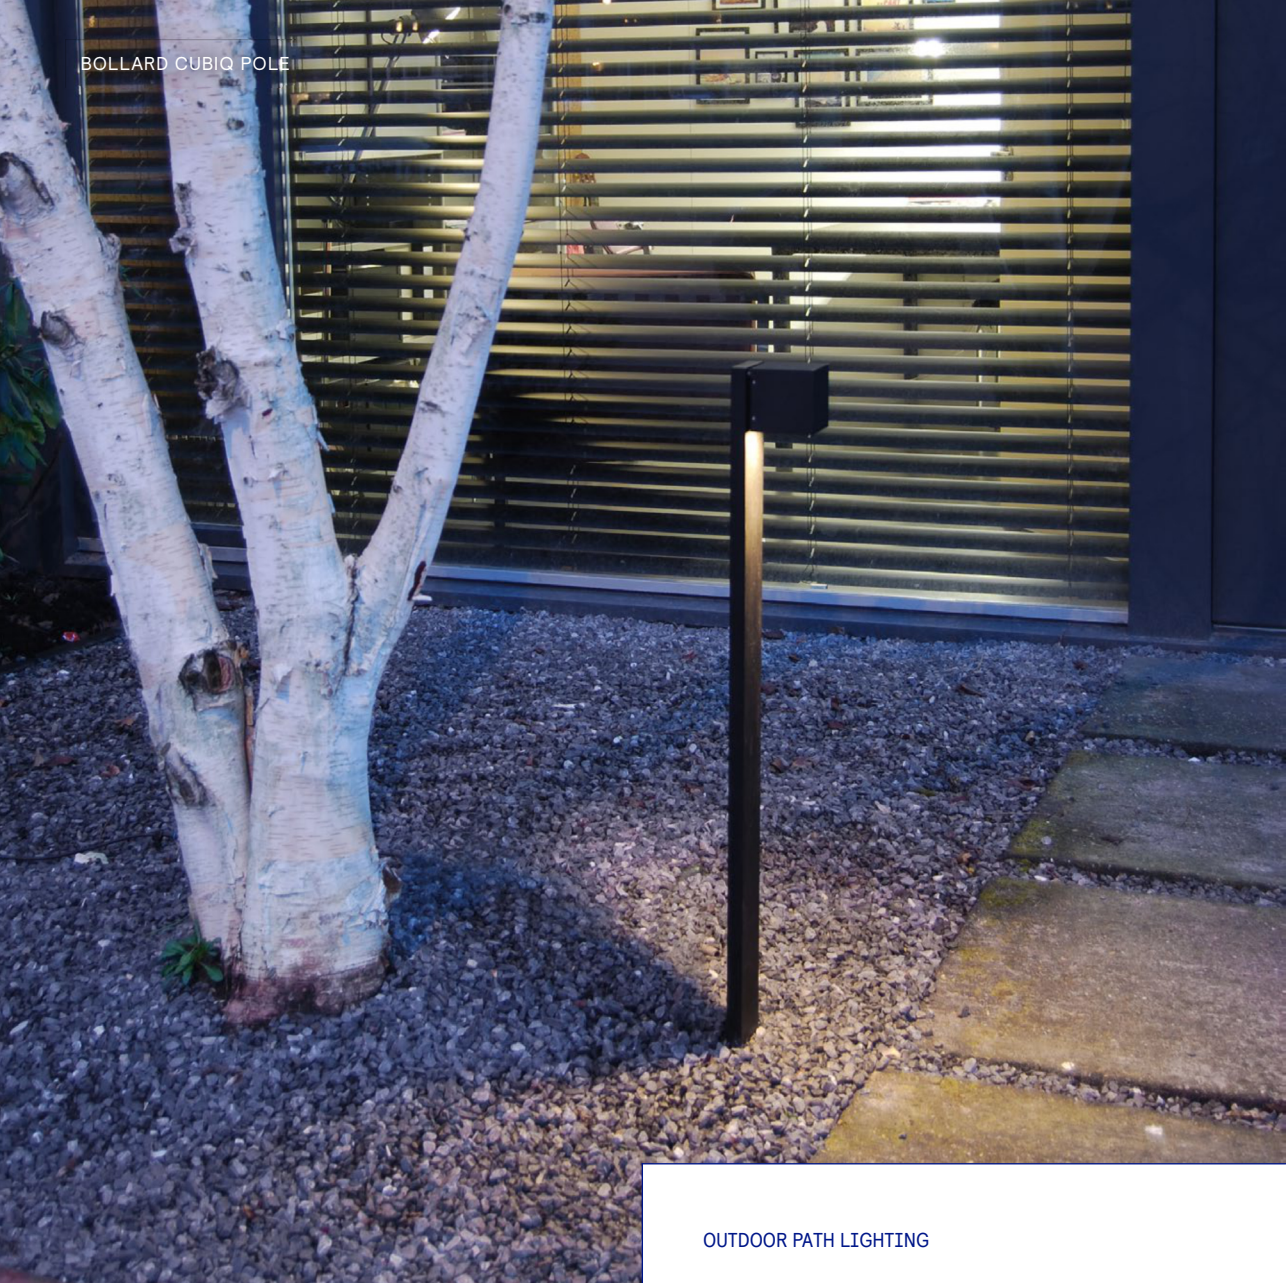


cubiq pole

OUTDOOR PATH LIGHTING

Modern outdoor pole luminaire with a minimalist cubic design and glare-free light distribution. Designed for comfortable path lighting in gardens, walkways, courtyards, and landscape areas. The recessed light source provides soft and comfortable illumination.


SPECIFICATIONS		CUBIQ POLE
LIGHTSOURCE		INTEGRATED LED
COLOR TEMP.		2700 K
LUMEN OUTPUT		730 LM
OPTIC		FROSTED GLASS
RATED VOLTAGE		24V DC or 230V AC
DIMMABLE		24V: PWM, 230V: TRIAC
POWER		6W
IP CLASS		IP54
INSULATION CLASS		24V: III , 230V: I
CABLE		1 M (NEOPRENE)




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE N0.	BLACK
CUBIQ POLE 90 24V	2530
CUBIQ POLE 90 230V	2532

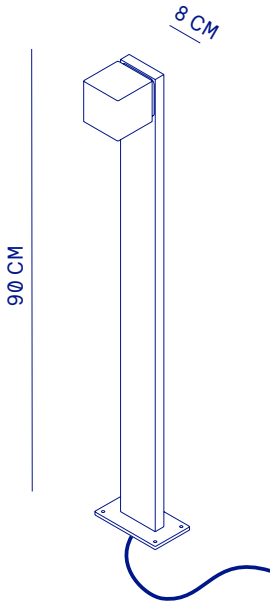

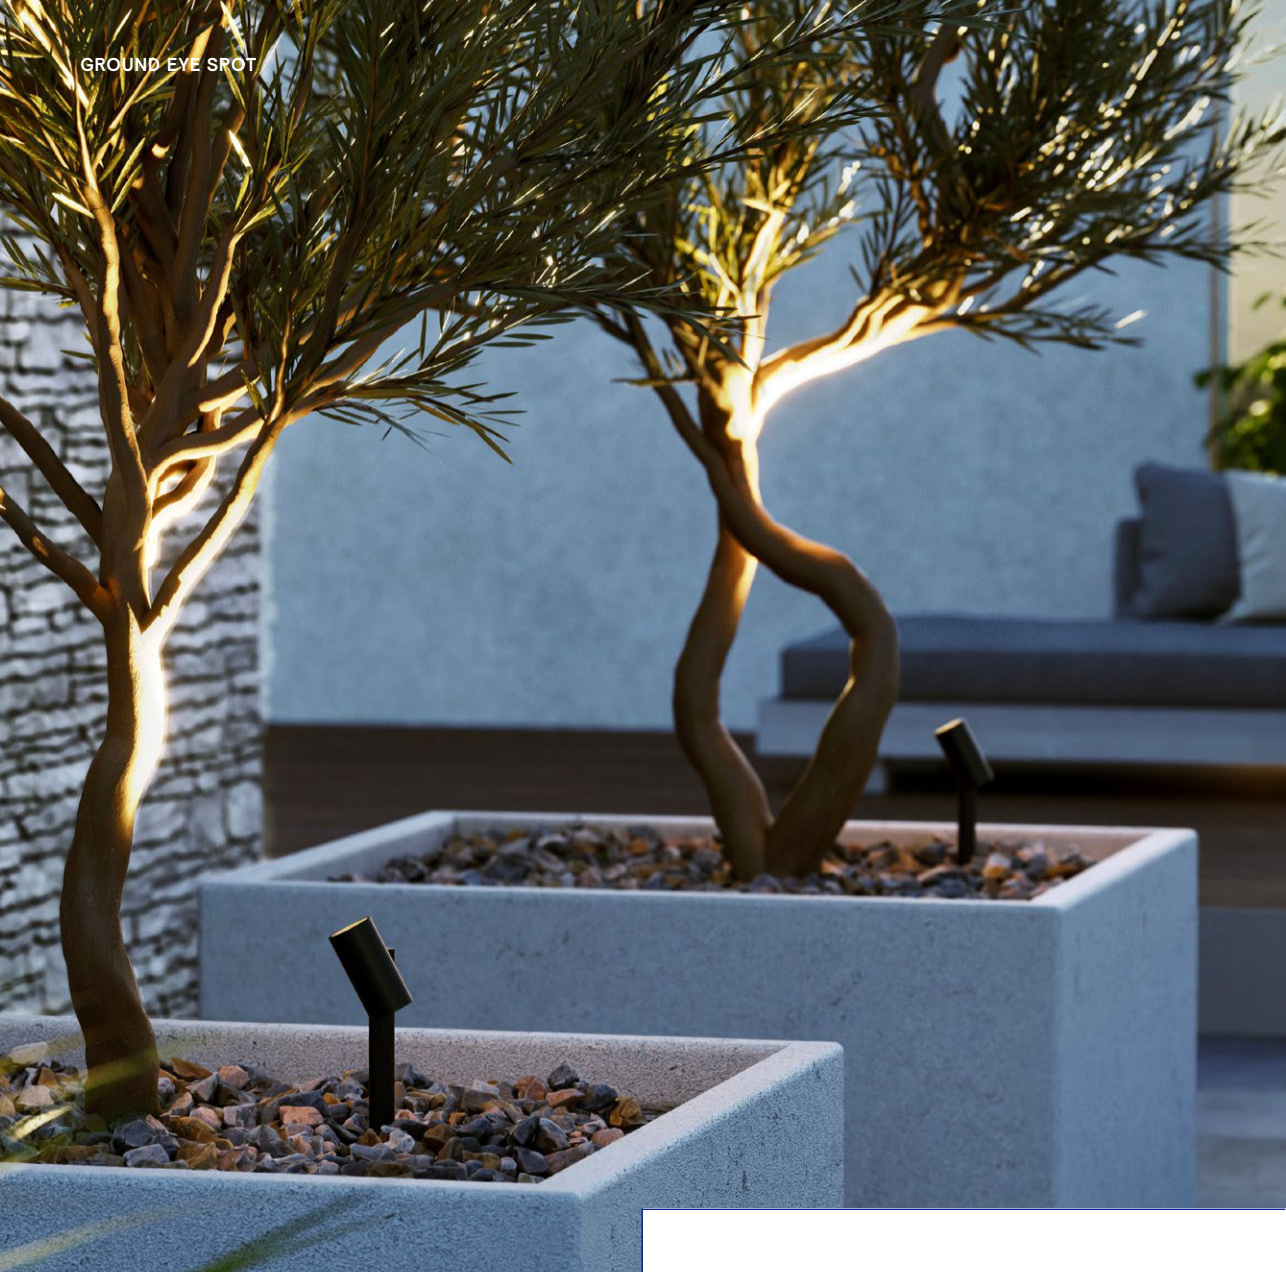

GROUND EYE SPOT


eye spot

spot / focus

OUTDOOR SPOT

A compact yet potent fixture designed to illuminate your garden features prominently. An ideal companion for the Eye series, this fixture boasts a robust anodized surface treatment and a high level of IP65 protection.

SPECIFICATIONS		EYE SPOT / EYE SPOT FOCUS
LIGHTSOURCE	CREE 2835	
COLOR TEMP.	2700 K	
LUMEN OUTPUT	360 LM / 2 X 360 LM	
OPTIC	25°	
RATED VOLTAGE	24V DC	
DIMMABLE	YES	
POWER	2,9 W / 5,8 W	
IP CLASS	IP65	
INSULATION CLASS	III	
CABLE	1 M (NEOPRENE)	




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ. **BLACK**

EYE SPOT 24V 1832

EYE SPOT FOCUS 24V 1834

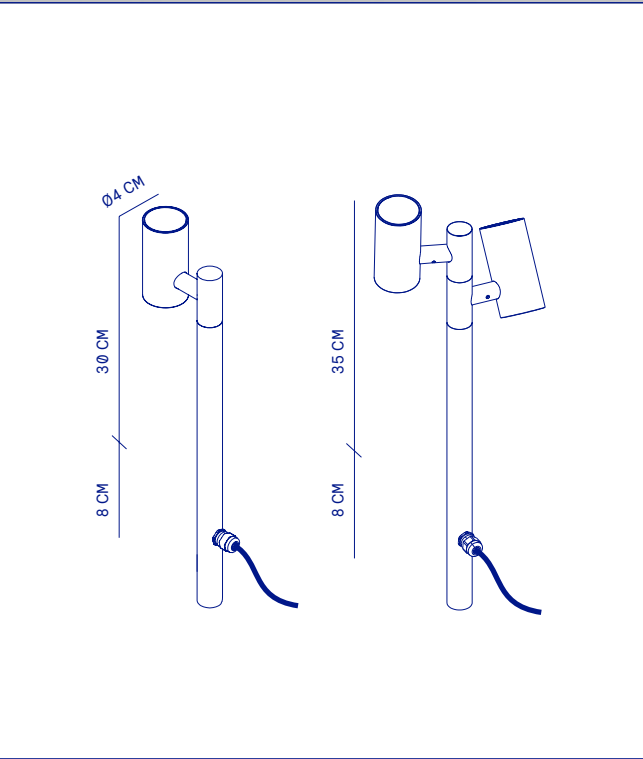

EYE SPOT

EYE SPOT FOCUS



ARCHITECTONIC PATH LIGHTING

An architonic path luminaire featuring a transparent structure and an invisible light source that creates a captivating V-shaped light beam. This innovative design provides a distinctive and visually appealing method to illuminate pathways and outdoor spaces.

ray

45 / 70


SPECIFICATIONS		RAY 45 / 70
LIGHTSOURCE		CREE 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		535 LM
OPTIC		FORWARD OPTIC
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		4,3 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)



INSTALLATION


Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN
RAY 45 24V	1912	1911
RAY 70 24V	1917	1916
GROUND SPIKE RAY	9018	

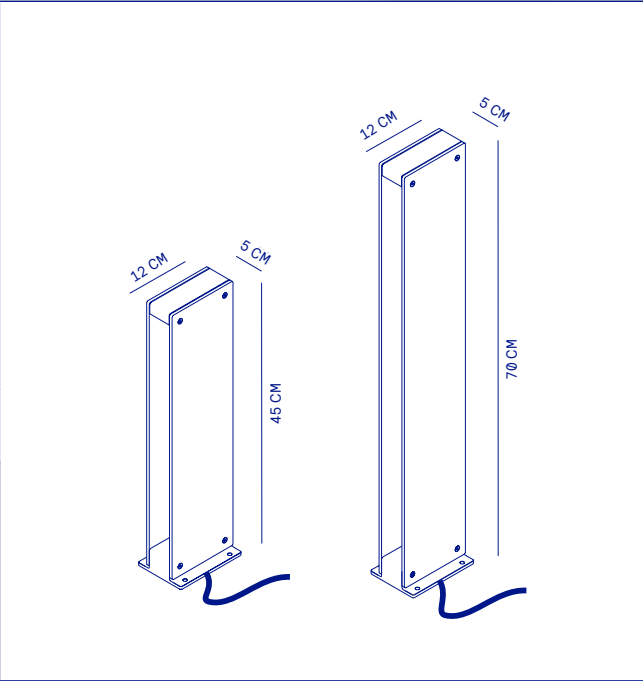

RAY 45

RAY 70

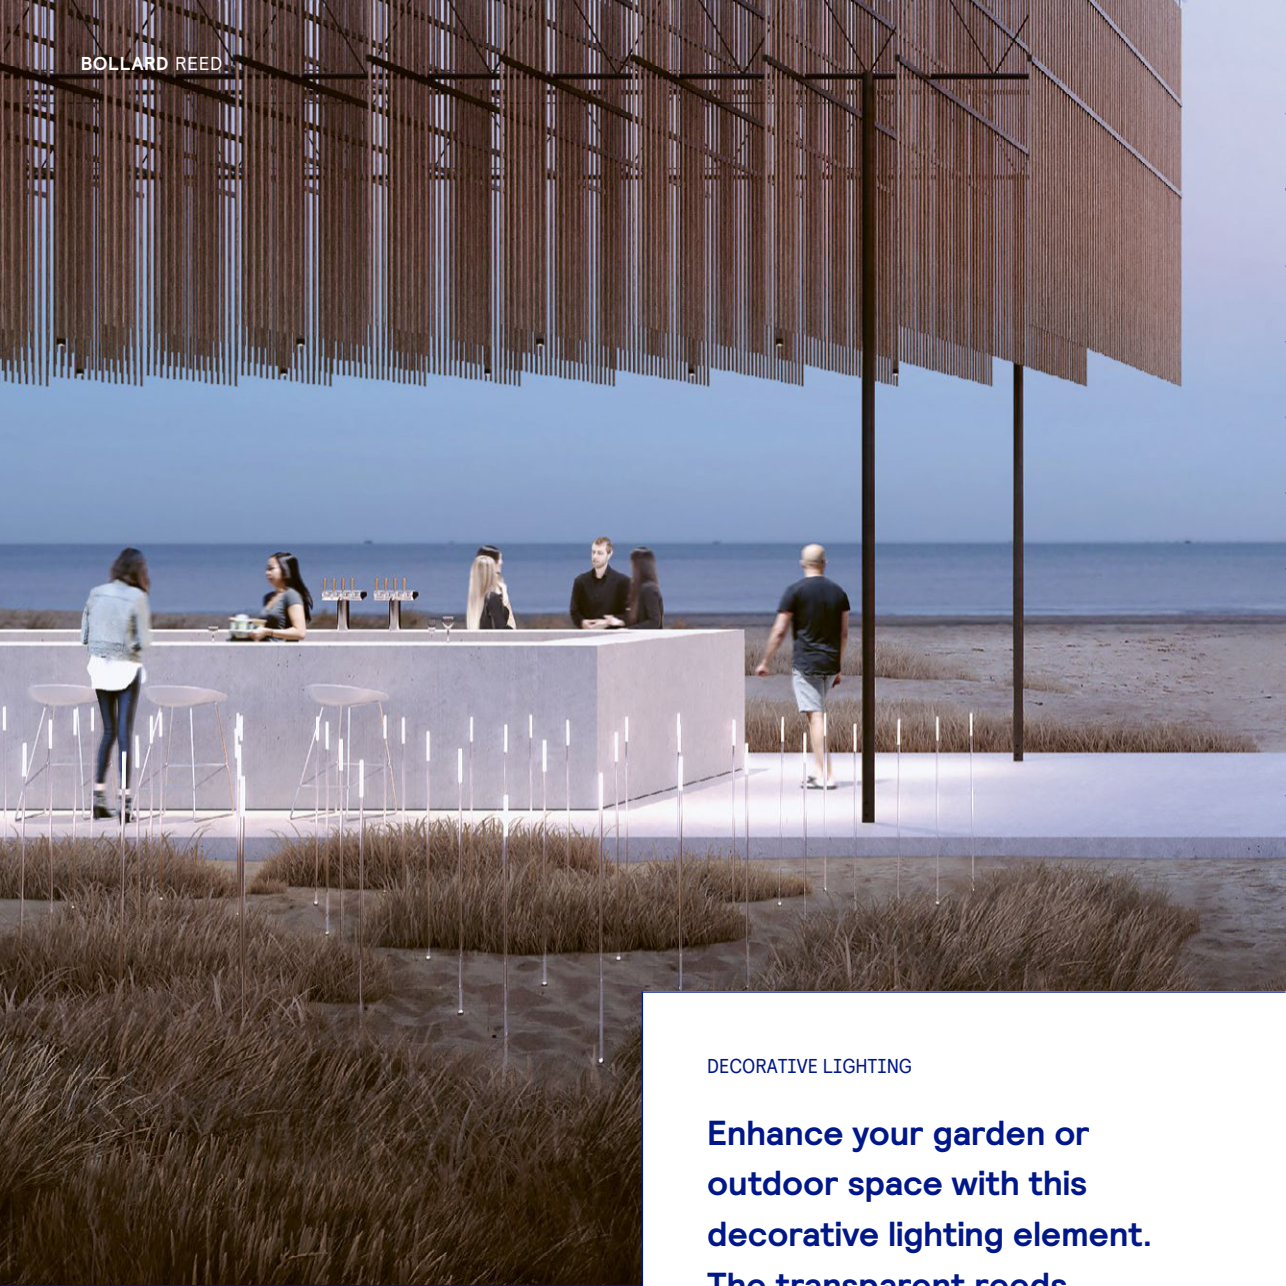

BOLLARD REED

reed

DECORATIVE LIGHTING

Enhance your garden or outdoor space with this decorative lighting element. The transparent reeds gracefully sway with the breeze, creating a captivating visual effect. The light emanates from the top where the acrylic fiber has been meticulously hand-brushed, adding an enchanting touch to your surroundings.

SPECIFICATIONS		REED / REED BUNDLE
LIGHTSOURCE		LUXEON 3030 HV
COLOR TEMP.		2700 K
LUMEN OUTPUT		85 LM / 3 X 85 LM
OPTIC		FIBER OPTIC
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		0,7 W / 2,1 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		Ø.6 M (NEOPRENE)



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.


ARTICLE NØ.

REED 24V

2110


REED BUNDLE 24V

2113

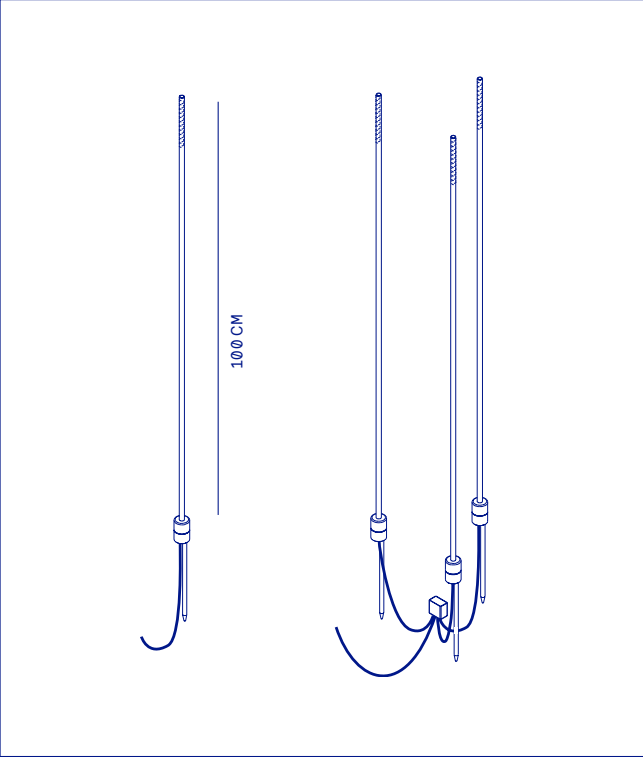

REED

REED BUNDLE

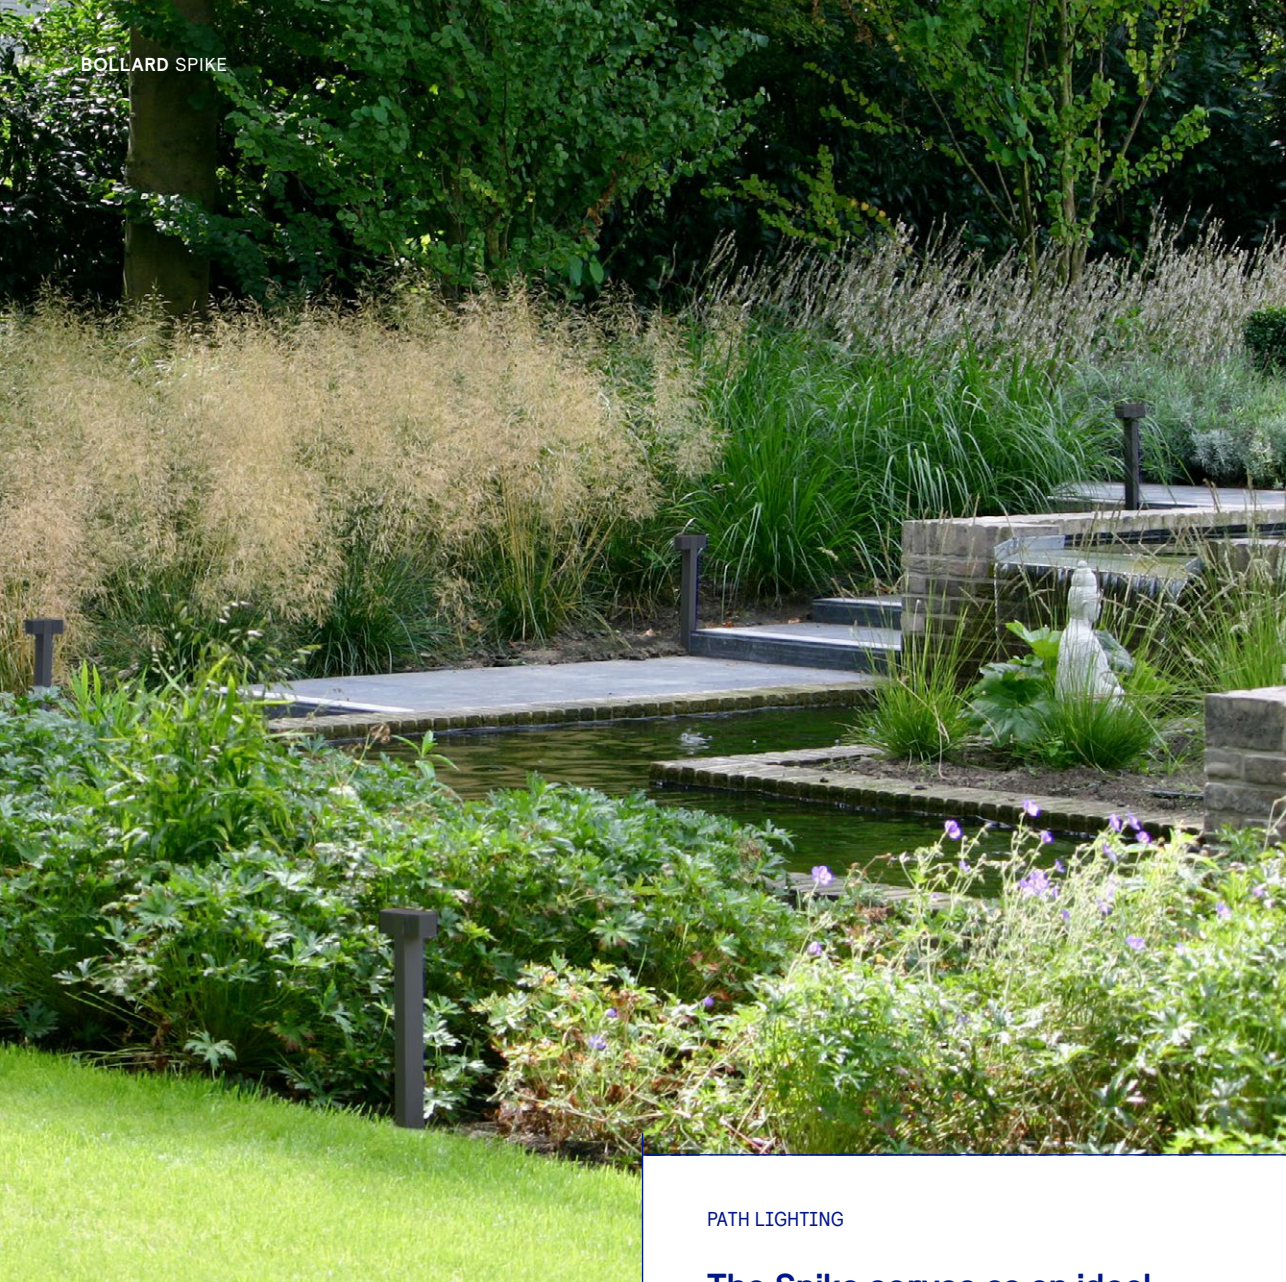


spike

mono / duo

PATH LIGHTING

The Spike serves as an ideal pathway lighting solution, available with one or two adjustable LED modules. This flexibility allows the fixture to meet the needs of both spot and path lighting, making it a great addition for enhancing the ambiance of your garden.

SPECIFICATIONS		SPIKE MONO / DUO
LIGHTSOURCE		CREE 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		260 LM / 2 X 260 LM
OPTIC		25°
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		2,2 W / 4,3 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.


ARTICLE NØ. BLACK

SPIKE MONO 24V 1052

SPIKE DUO 24V 1072

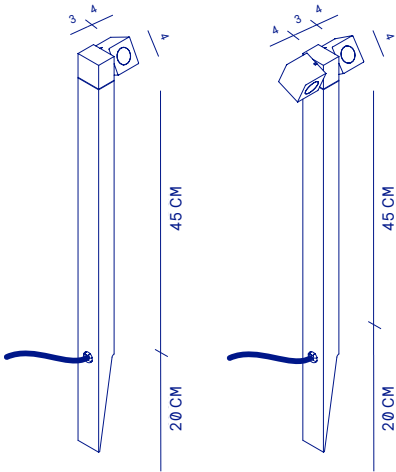

SPIKE MONO SPIKE DUO

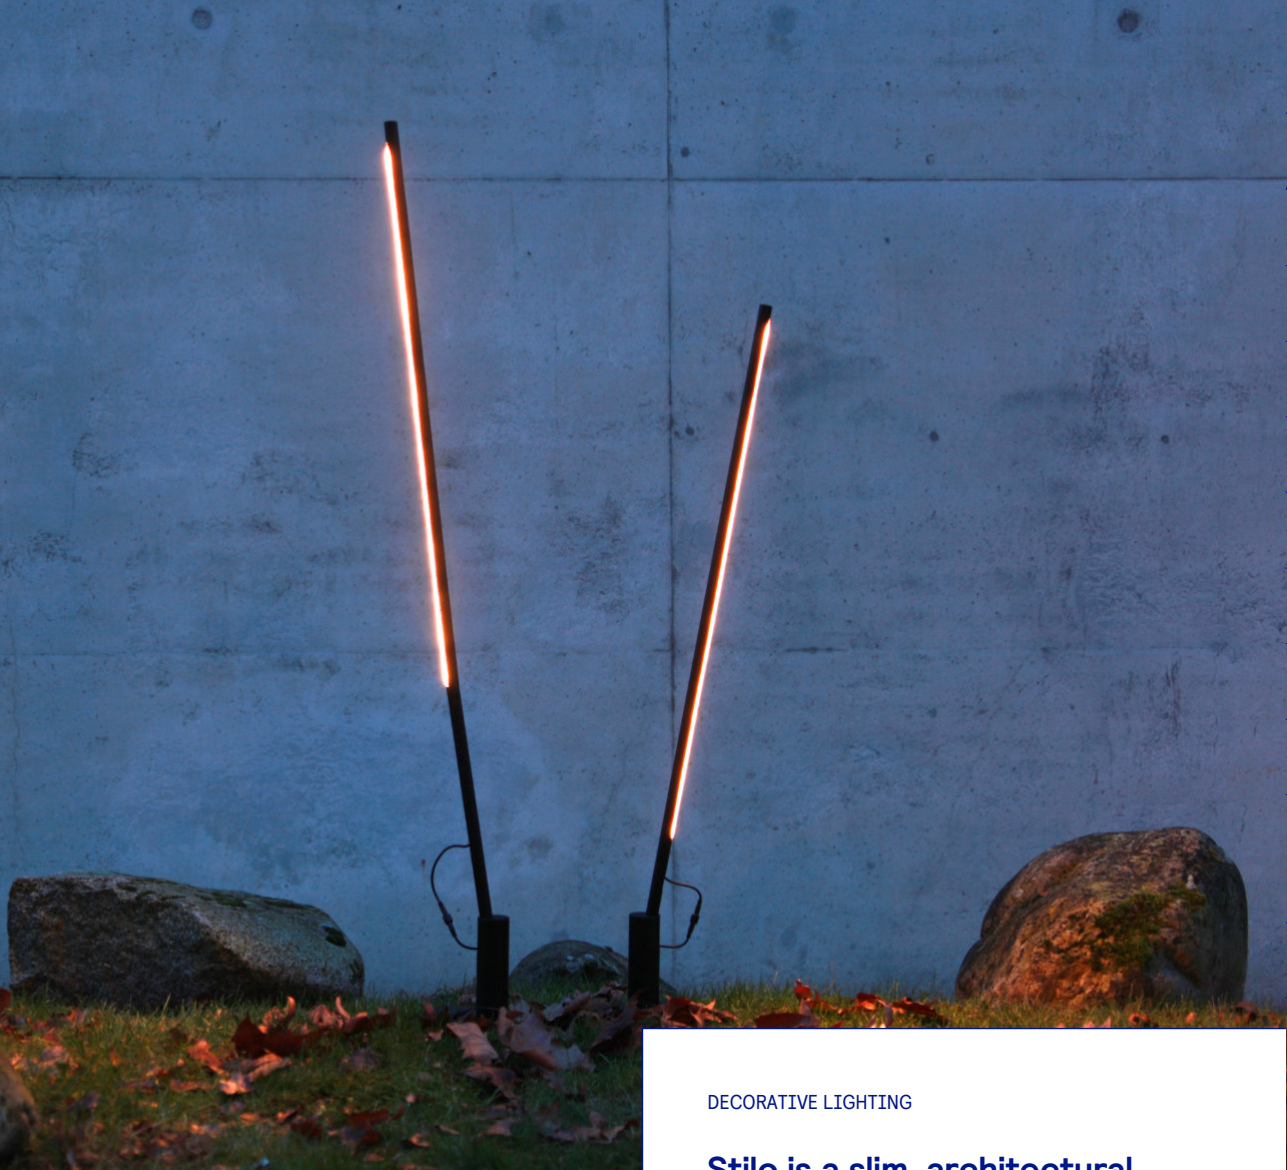

stilo

100 / 125

DECORATIVE LIGHTING

Stilo is a slim, architectural outdoor fixture designed to blend naturally into any landscape. Its minimalist profile and precise light output make it ideal for path lighting, planting beds, and subtle architectural accents.

Available in 100 cm and 125 cm. When combined, the two Heights create a beautifully layered composition.

SPECIFICATIONS		STILO 100 / 125
LIGHTSOURCE		NEON LED STRIP
COLOR TEMP.		2700 K
LUMEN OUTPUT		160 LM
OPTIC		DIFFUSER
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		7 W
IP CLASS		IP67
INSULATION CLASS		III
CABLE		1 M (NEOPRENE)



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.


ARTICLE NØ.

STILO 100 BLACK 24V

3310

STILO 125 BLACK 24V

3320

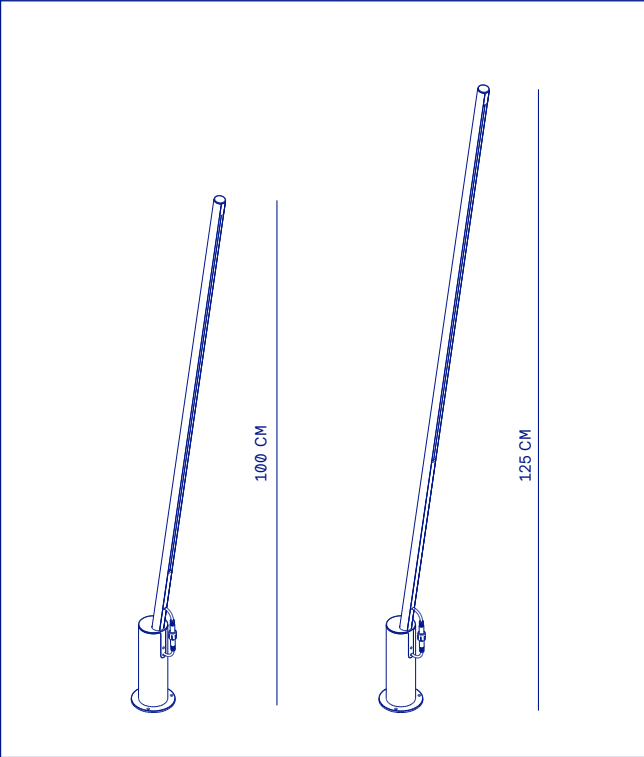

STILO 100

STILO 125



DESIGN GARDEN LUMINAIRE

torch

40 / 65

A brushed stainless steel bollard that produces subtle indirect light. It incorporates a stainless steel reflector on top of the fixture.

Available in two versions:

- > B reflects the light around
- > C reflects the light around and upwards


SPECIFICATIONS		TORCH 40 / 65
LIGHTSOURCE		LUXEON REBEL
COLOR TEMP.		2700 K
LUMEN OUTPUT		160 LM
RATED VOLTAGE		24V DC OR 230V AC
DIMMABLE		NO
POWER		3 W
IP CLASS		IP65
INSULATION CLASS		24V: III , 230V: I
CABLE		1 M (NEOPRENE)




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.		B	C
TORCH 40	24V	0810	0830
	230V	0811	0831
TORCH 65	24V	0820	0840
	230V	0821	0841
GROUND SPIKE TORCH		9010	

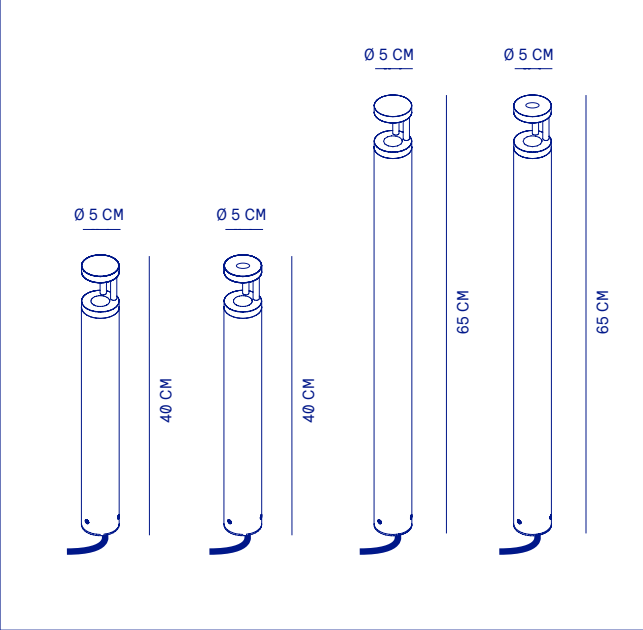

TORCH 40 B TORCH 40 C TORCH 65 B TORCH 65 C

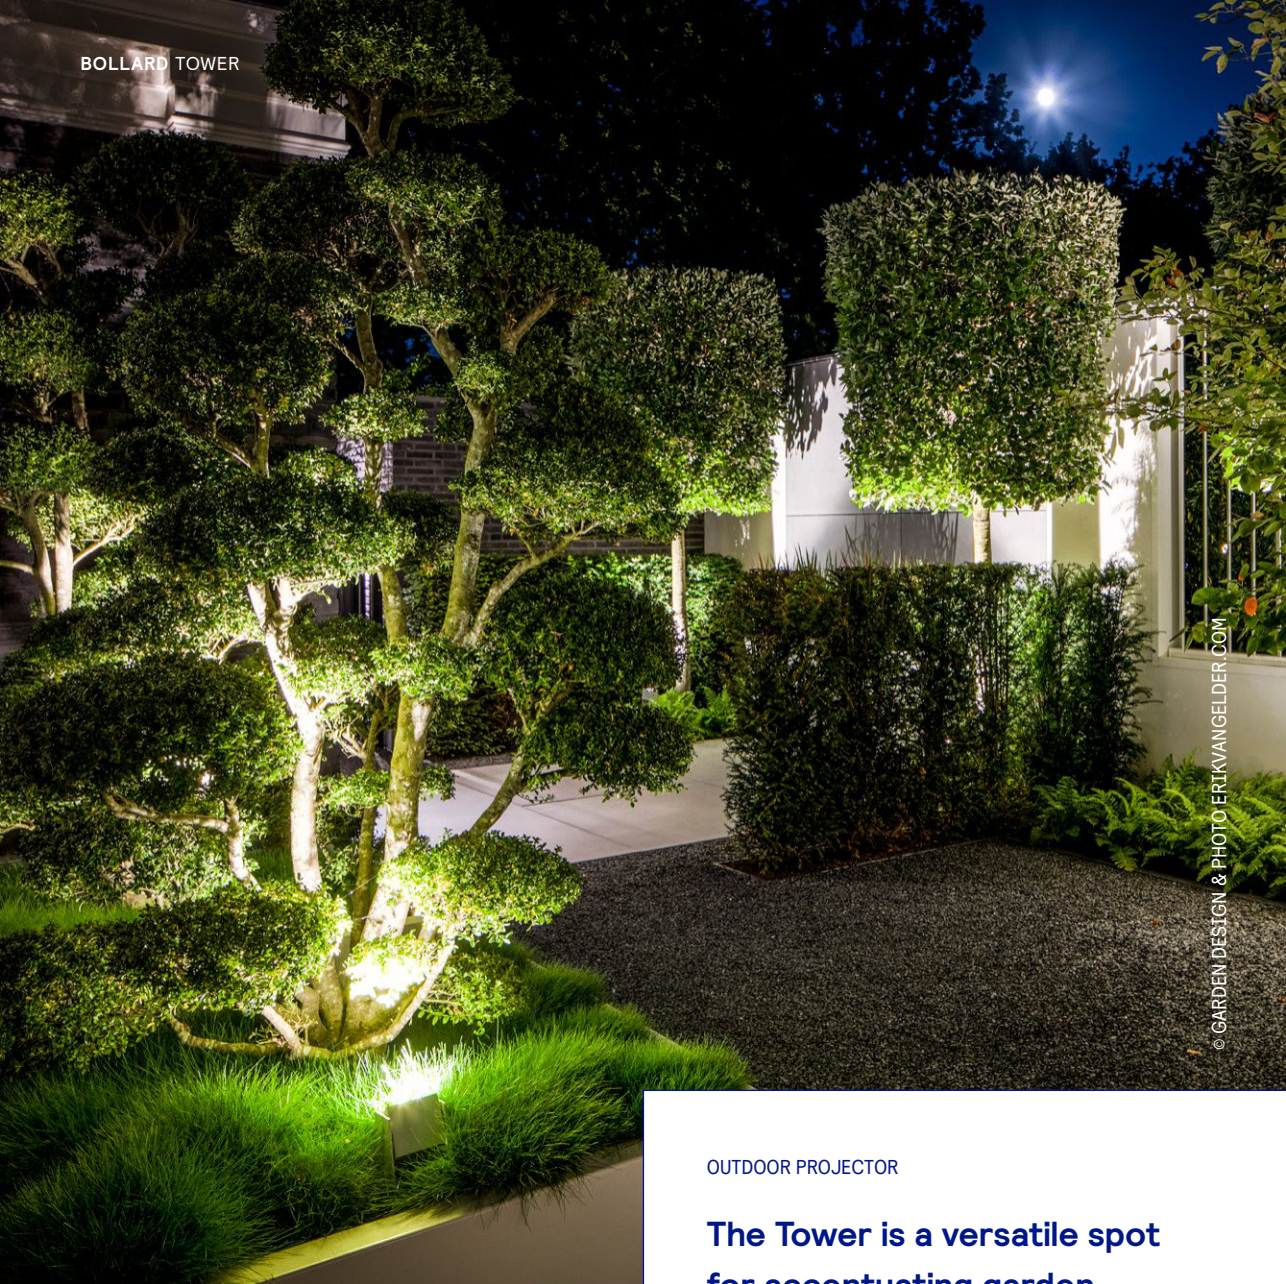


tower

OUTDOOR PROJECTOR

The Tower is a versatile spot for accentuating garden elements, trees and plants. The tower is available with three different beam angles and three colours, black powder coated or natural anodized. For an optimal installation this projector is available in 24V and 230V.


SPECIFICATIONS	TOWER
LIGHTSOURCE	LUXEON M
COLOR TEMP.	2700 K
LUMEN OUTPUT	800 LM
OPTICS	8° / 27° / 40°
RATED VOLTAGE	24V DC OR 230V AC
DIMMABLE	24V YES, 230V ON REQUEST
POWER	10 W
IP CLASS	IP65
INSULATION CLASS	24V: III , 230V: I
CABLE	1 M (NEOPRENE)

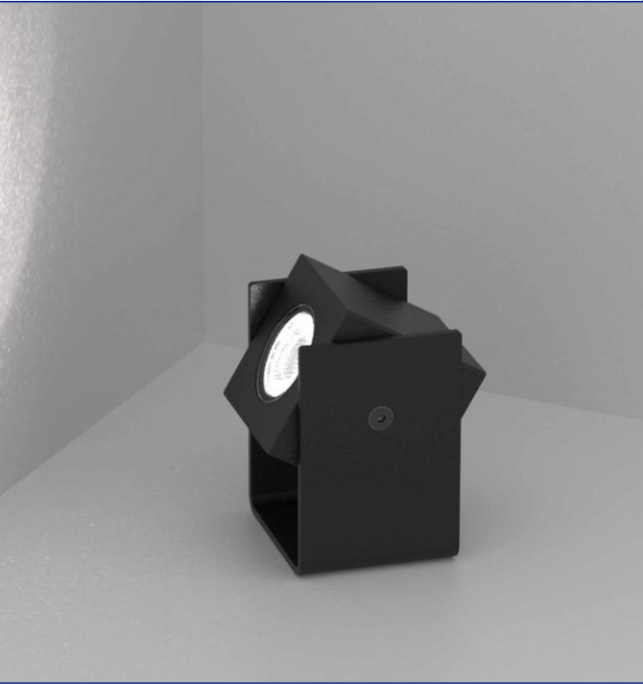

INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NO.		BLACK	CORTEN
TOWER 8°	24V	1470	1471
	230V	1456	1450
TOWER 27°	24V	1473	1474
	230V	1457	1451
TOWER 40°	24V	1476	1477
	230V	1458	1452
GROUND SPIKE TOWER		9016	

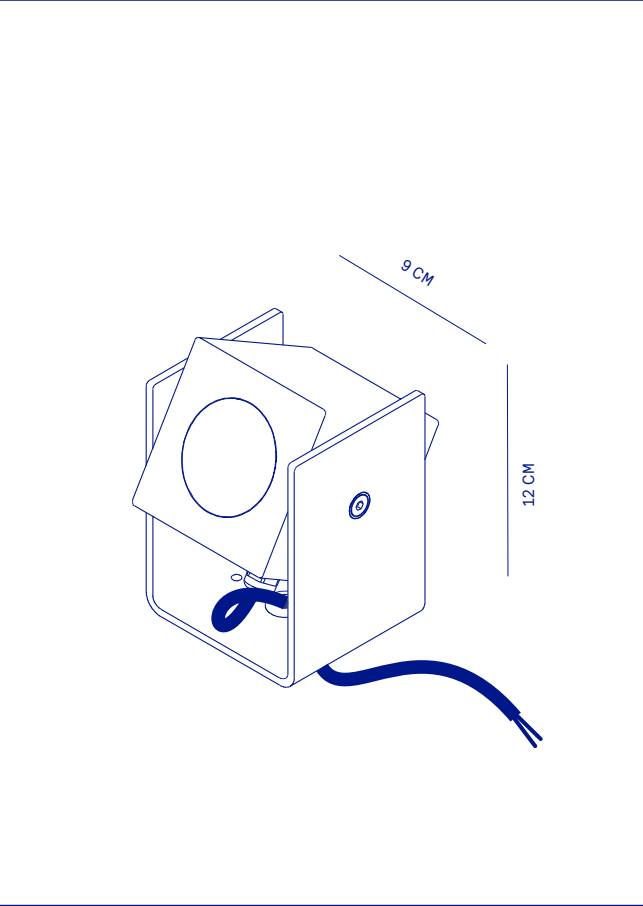

TOWER



A STEPLESS ADJUSTABLE LUMINAIRE


The luminaire's characteristics are defined by its magnitude and direction. It features a potent light source and a continuously adjustable lamp, making it suitable for hospitality and architectural lighting applications such as sauna complexes or hotels. It is offered in two different heights to accommodate your preferences and needs.

DESIGN: MICHIEL CORNELISSEN

vector pole


200 / 250

SPECIFICATIONS		VECTOR POLE	
LIGHTSOURCE		LUXEON COB	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		1400 LM	
OPTIC		25° FROSTED	
RATED VOLTAGE		230V 50-60HZ	
DIMMABLE		TRIAC	
POWER		12 W	
IP CLASS		IP65	
INSULATION CLASS		I	
CABLE		1 M (NEOPRENE)	
ARTICLE NØ.		BLACK	
VECTOR POLE 200		2610	
VECTOR POLE 250		2612	
GROUND SPIKE VECTOR POLE		9015	

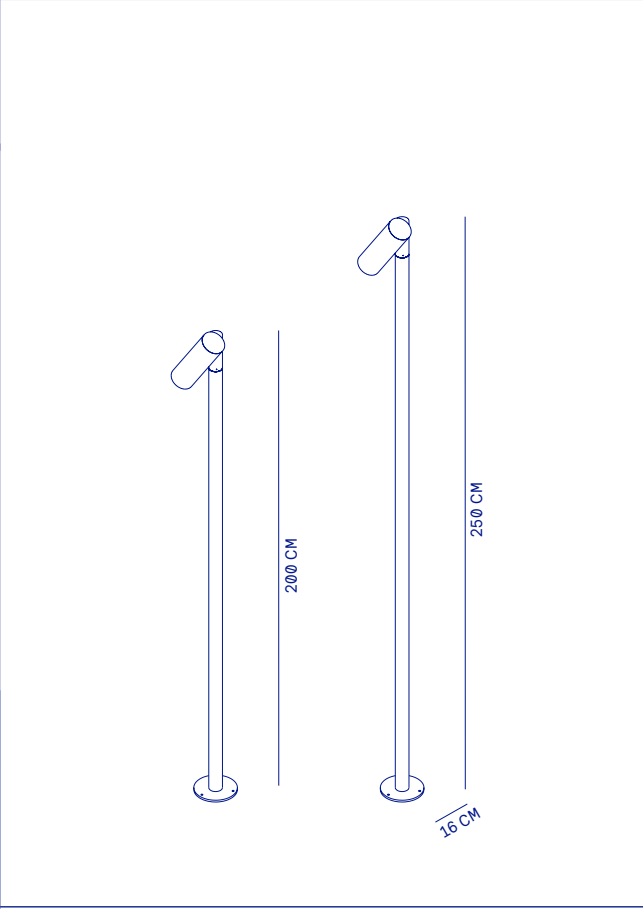

VECTOR POLE

WALL BENT WALL LEFT / RIGHT

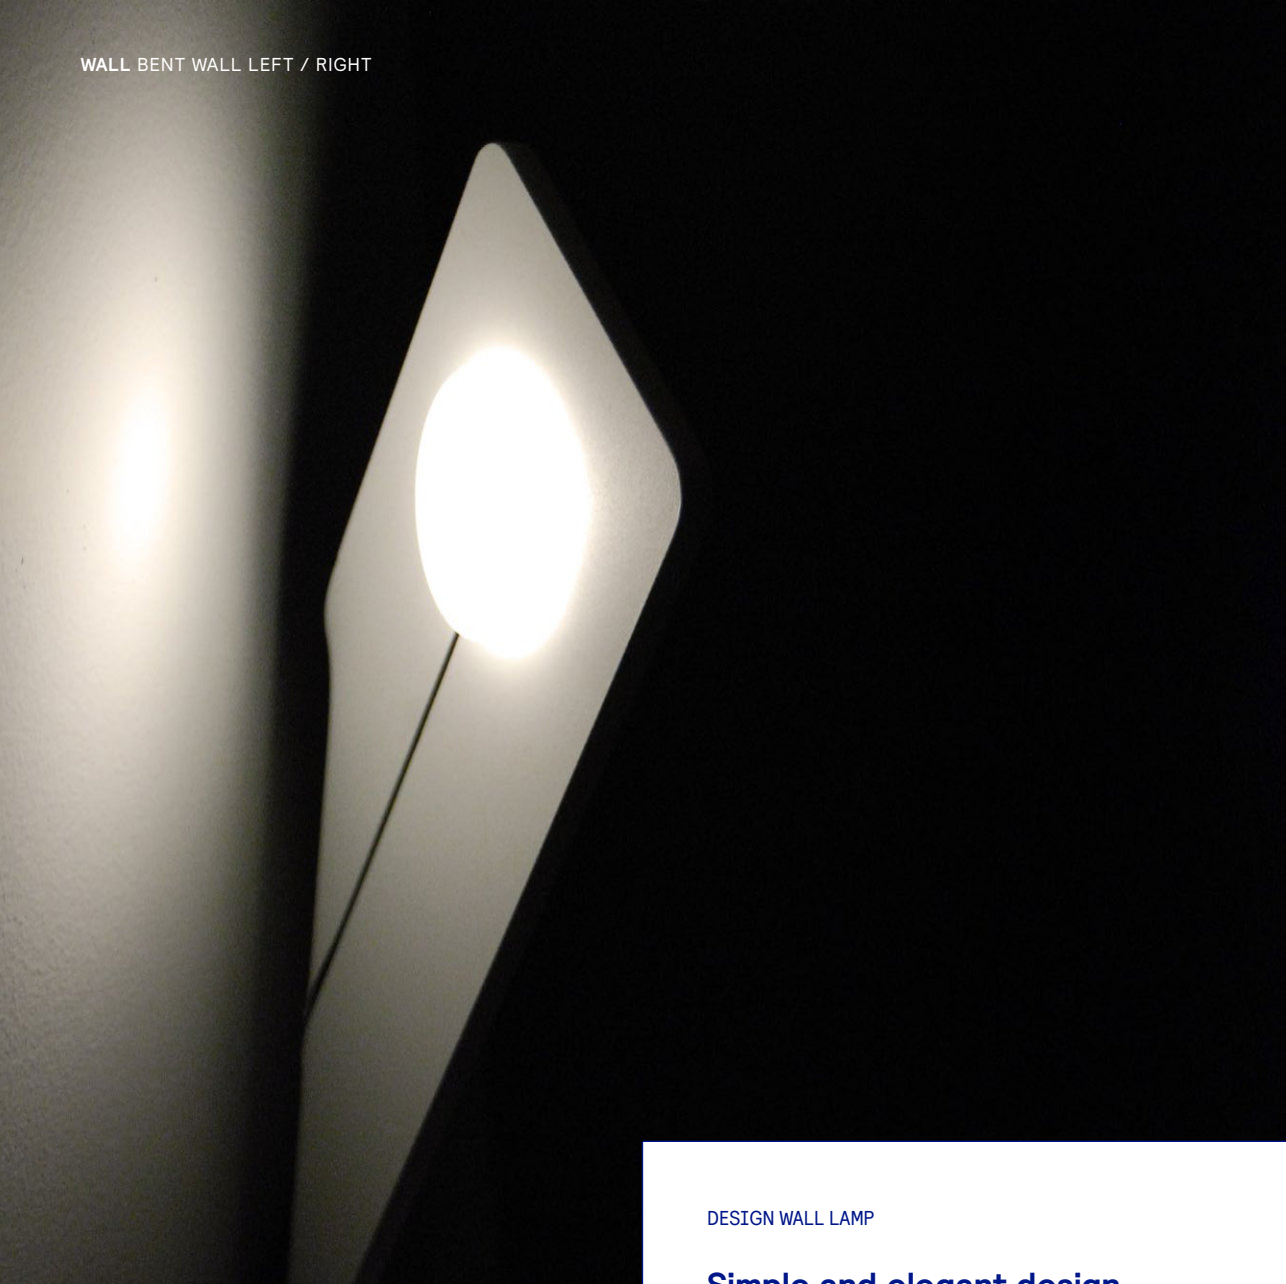


bent wall

left / right

DESIGN WALL LAMP

Simple and elegant design for striking lighting effects on walls. With 2 versions left and right, a symmetrical arrangement is possible with this design. Available in different colors for many applications outdoors or indoors.

WALL BRICK

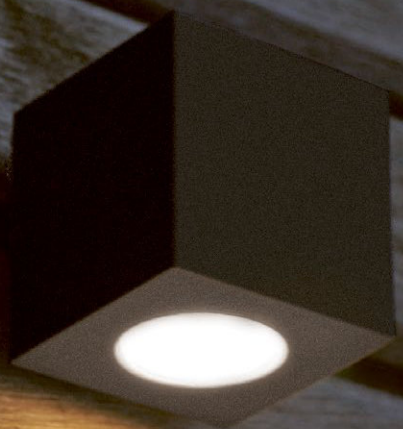

brick

OUTDOOR WALL FIXTURE

The Brick is a sleek and compact lighting fixture designed to provide both style and functionality. Its minimalist design makes it a versatile addition to any element in your garden.


SPECIFICATIONS		BRICK
LIGHTSOURCE		CREE 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		130 LM
OPTIC		DIFFUSER
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		1 W
IP CLASS		IP65
INSULATION CLASS		III
CABLE		2 M (NEOPRENE)



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN	WHITE
BRICK 24V	1080	1082	1084





WALL CUBE

cubiq

OUTDOOR WALL FIXTURE

Cubiq is a robust aluminium fixture designed for installation on houses and garden elements. It provides a defined oval light distribution via an integrated reflector. The Cubiq Frosted shares the same design and construction, but uses frosted glass to create a softer, more evenly diffused light output. Both models are available in white, black, and corten finishes, and in 24V and 230V versions.


CUBIQ	24V	230V
LIGHTSOURCE	CREE 2835	LUXEON COB
COLOR TEMP.	2700 K	2700 K
LUMEN OUTPUT	730 LM	730 LM
OPTIC	REFLECTOR 70°	REFLECTOR 70°
RATED VOLTAGE	24V DC	230V AC
DIMMABLE	PWM	TRIAC
POWER	6 W	6 W
IP CLASS	IP54	IP54
INSULATION CLASS	III	I



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN	WHITE
CUBIQ 24V	2924	2926	2925
CUBIQ 230V	2921	2923	2922

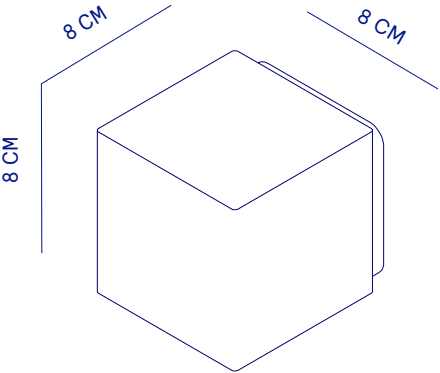



CUBIQ DUO	24V	230V
LIGHTSOURCE	CREE 2835	LUXEON COB
COLOR TEMP.	2700 K	2700 K
LUMEN OUTPUT	2x 370 LM	2x 370 LM
OPTIC	REFLECTOR 70°	REFLECTOR 70°
RATED VOLTAGE	24V DC	230V AC
DIMMABLE	PWM	TRIAC
POWER	6 W	6 W
IP CLASS	IP54	IP54
INSULATION CLASS	III	I



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE N°.	BLACK	CORTEN	WHITE
CUBIQ DUO 24V	2930	2932	2931
CUBIQ DUO 230V	2927	2929	2928

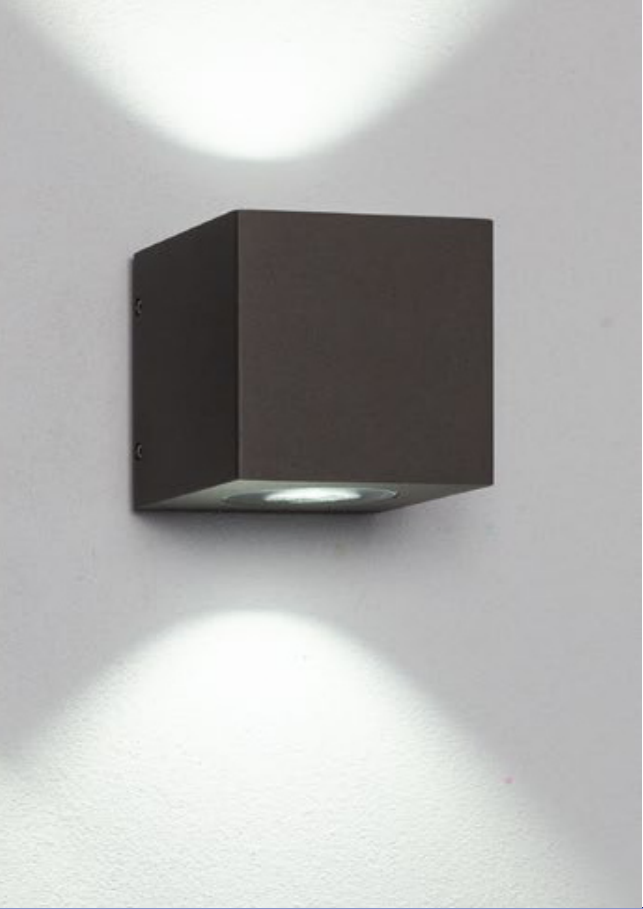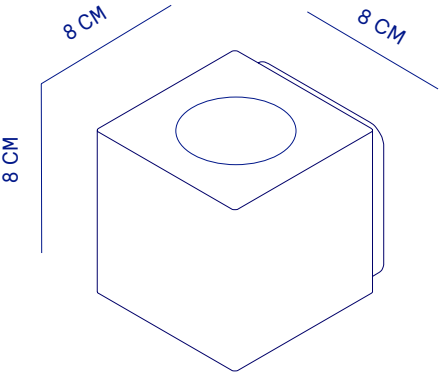


CUBIQ FROSTED	24V	230V
LIGHTSOURCE	CREE 2835	LUXEON COB
COLOR TEMP.	2700 K	2700 K
LUMEN OUTPUT	730 LM	730 LM
OPTIC	FROSTED	FROSTED
RATED VOLTAGE	24V DC	230V AC
DIMMABLE	PWM	TRIAC
POWER	6 W	6 W
IP CLASS	IP54	IP54
INSULATION CLASS	III	I



INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN	WHITE
CUBIQ FROSTED 24V	2936	2938	2937
CUBIQ FROSTED 230V	2933	2935	2934

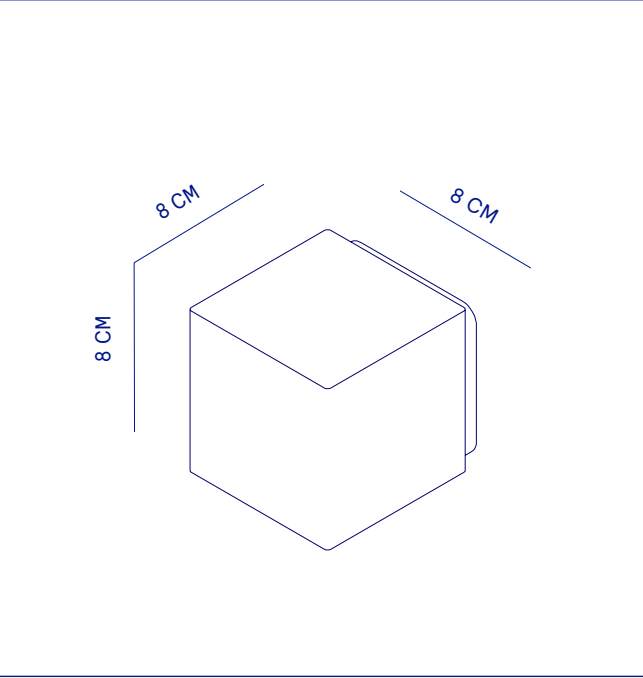


CUBIQ FROSTED DUO	24V	230V
LIGHTSOURCE	CREE 2835	LUXEON COB
COLOR TEMP.	2700 K	2700 K
LUMEN OUTPUT	2x 370 LM	2x 370 LM
OPTIC	FROSTED	FROSTED
RATED VOLTAGE	24V DC	230V AC
DIMMABLE	PWM	TRIAC
POWER	6 W	6 W
IP CLASS	IP54	IP54
INSULATION CLASS	III	I




INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.	BLACK	CORTEN	WHITE
CUBIQ FROSTED DUO 24V	2942	2944	2943
CUBIQ FROSTED DUO 230V	2939	2941	2940

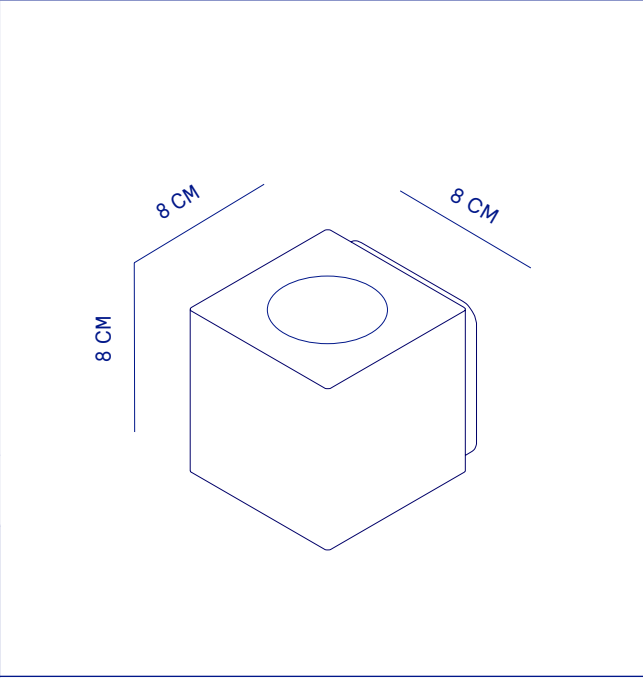

WALL EDDY

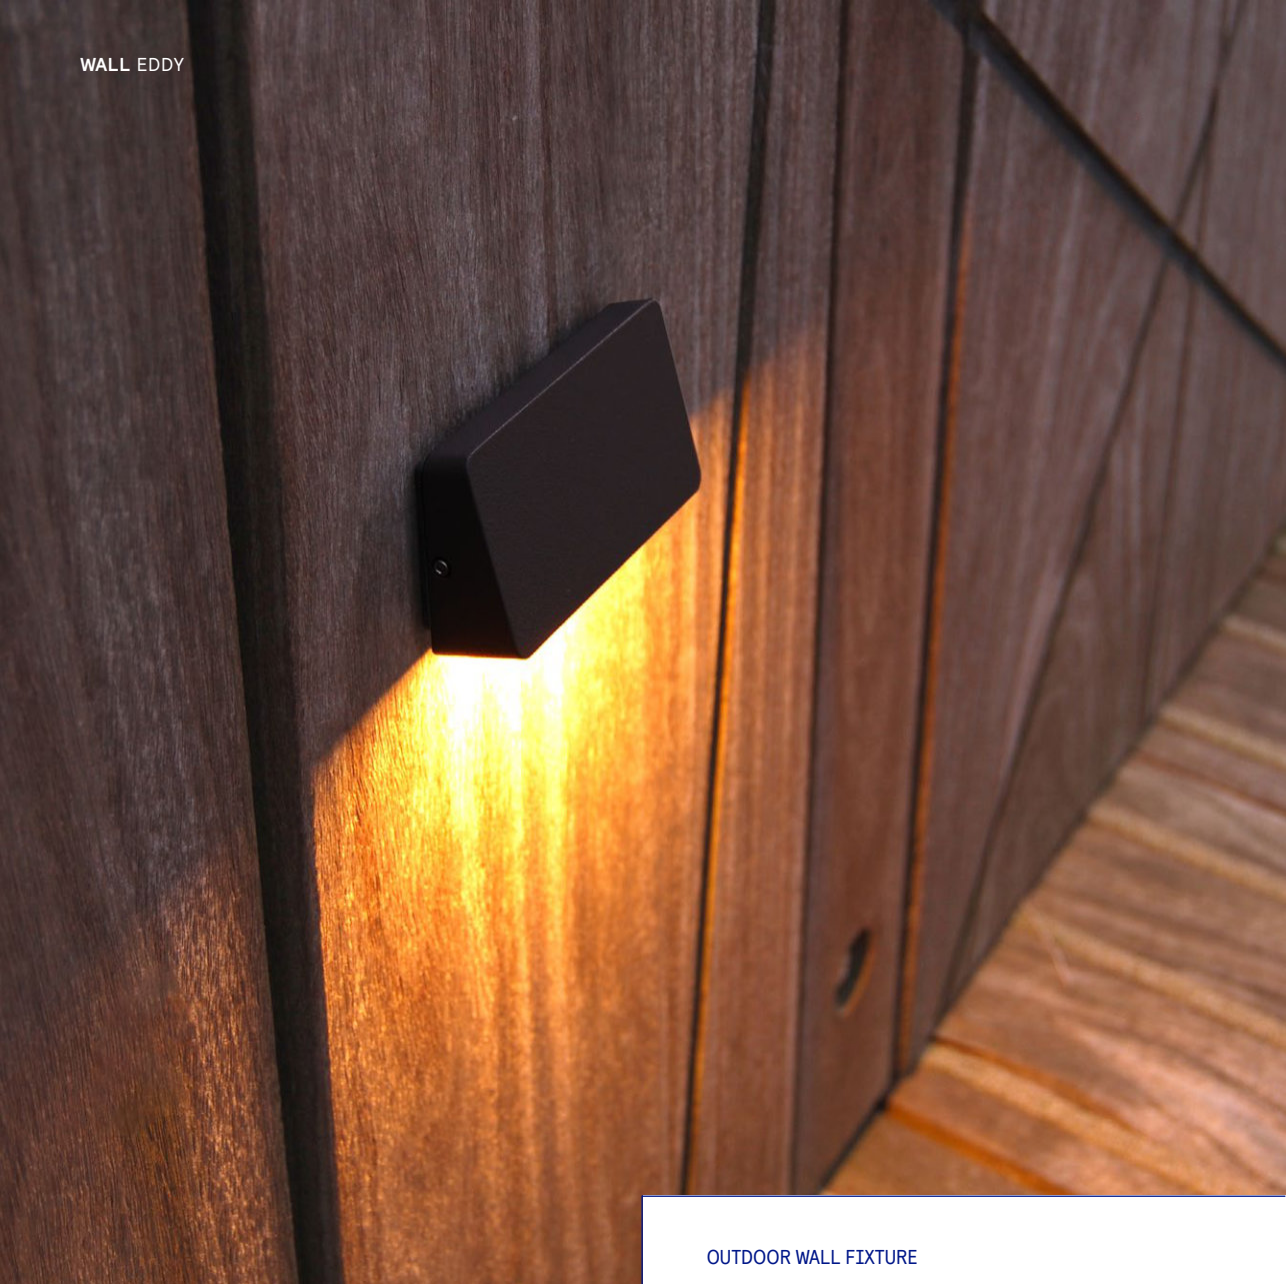

eddy


OUTDOOR WALL FIXTURE

**Enhance your outdoor
ambiance with subtle wall
lighting that creates gentle
light accents. Eddy is a perfect
solution for elegantly marking
stairs, steps, and pathways.
Available in two colors, with an
optional mount plate.**

SPECIFICATIONS		EDDY 24V
LIGHTSOURCE		CREE 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		360 LM
OPTIC		DIFFUSER
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		2,9 W
IP CLASS		IP65
INSULATION CLASS		III

<div> <div>INSTALLATION</div> <div> <p>Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.</p> </div> </div>		
--	--	--

ARTICLE N0.	BLACK	CORTEN
EDDY 24 V	2014	2013
MOUNT PLATE EDDY	9032	9033

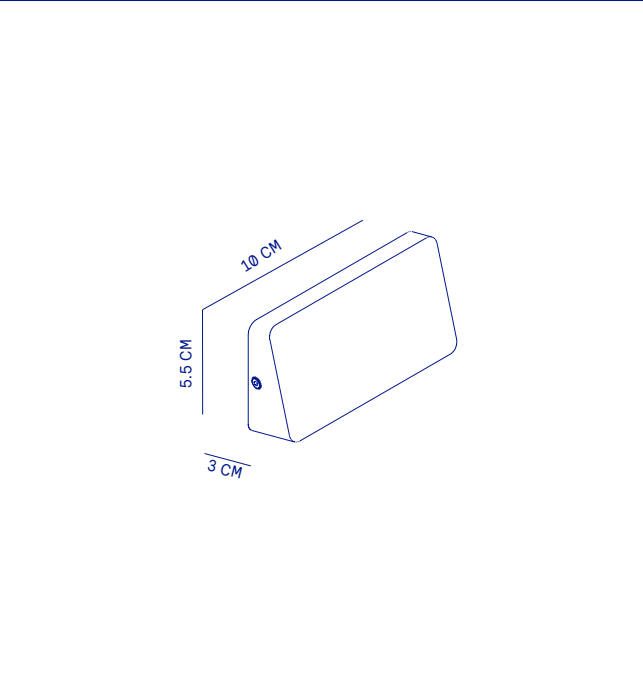

WALL LIV LINEAR





OUTDOOR WALL FIXTURE

The Liv Linear is a lighting fixture created through a collaboration between Dexter and Eternit (Schweiz) AG. Its design features a shell made from fiber cement, making it both durable and stylish. This fixture is ideal for accentuating architectural facades or providing illumination for pathways and borders, combining aesthetic appeal with functionality.

DESIGN: STUDIO RAINER MUTSCH

**liv
linear**

SPECIFICATIONS		LIV LINEAR
LIGHTSOURCE	LUXEON 3014	
COLOR TEMP.	2700 K	
LUMEN OUTPUT	900 LM	
RATED VOLTAGE	230V 50-60HZ	
DIMMABLE	ON REQUEST	
POWER	11 W	
IP CLASS	IP54	
INSULATION CLASS	I	
ARTICLE NØ.		
LIV LINEAR		2320

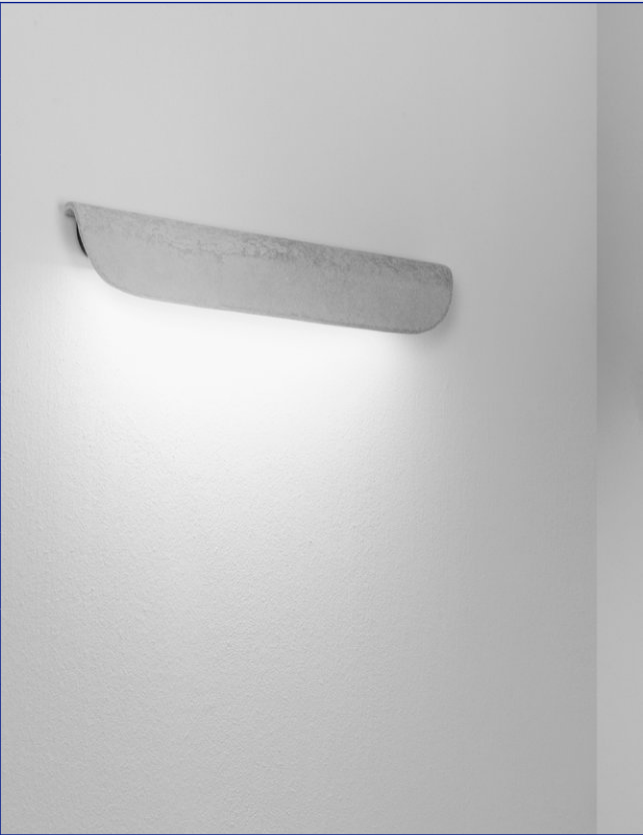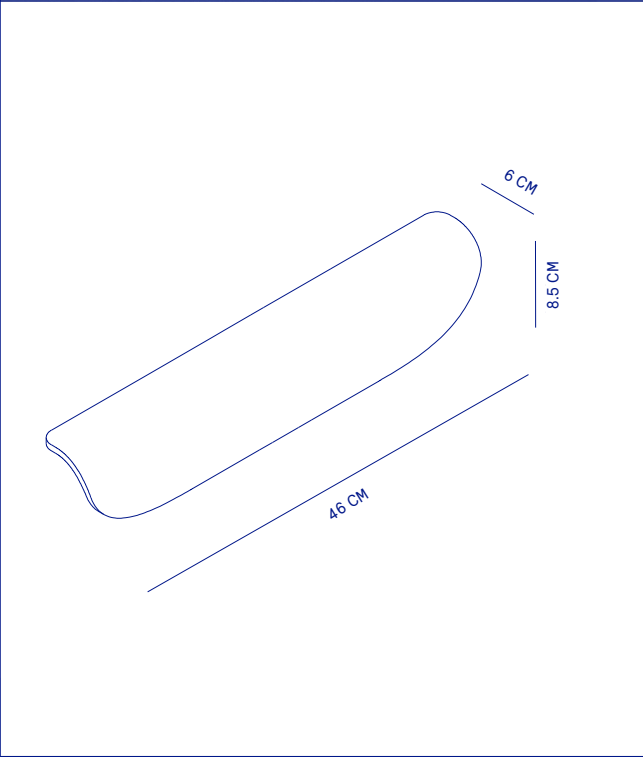




noor

DECORATIVE WALL LIGHTING

This modern outdoor wall light reinterprets the timeless form of a classical torch in a contemporary architectural design. Clean lines and a refined silhouette create a striking balance between tradition and modernity, making the fixture both recognizable and distinctive.

SPECIFICATIONS		NOOR	
LIGHTSOURCE	FILAMENT LAMP (NOT INCLUDED)		
SOCKET	E27		
RATED VOLTAGE	230V AC		
GLAS	TRANSPARENT		
POWER	MAX 10W		
IP CLASS	IP44		
INSULATION CLASS	I		
ARTICLE NØ.			
NOOR BLACK 230V		3500	
MOUNT PLATE NOOR		9030	

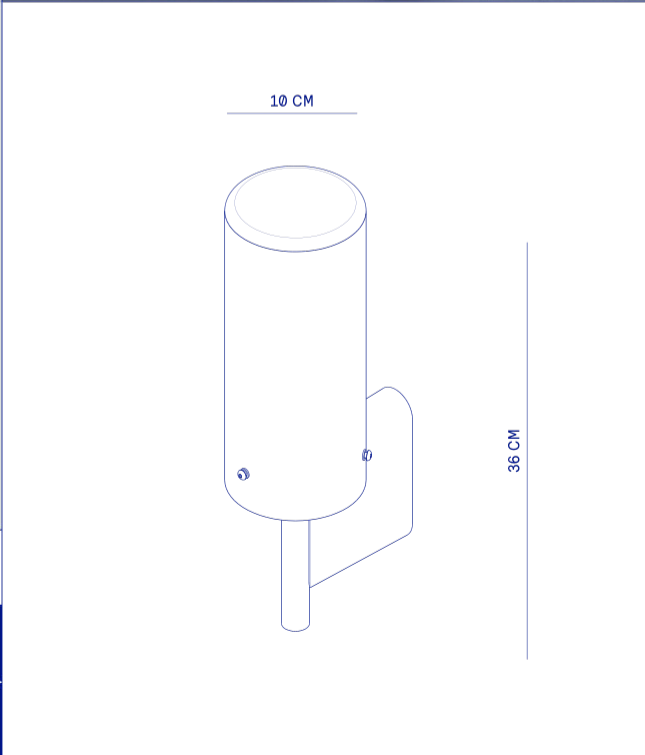

NOOR





stilo wall

DECORATIVE WALL LIGHTING


A refined, minimalist wall fixture designed for precise, architectural lighting. Stilo Wall subtly highlights textures and façades, bringing depth and character without distraction. Its singular, elegant form allows it to integrate seamlessly into any exterior composition, offering controlled illumination with a clean, contemporary aesthetic.

SPECIFICATIONS		STILO WALL	
LIGHTSOURCE		NEON LED STRIP	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		160 LM	
OPTIC		DIFFUSER	
RATED VOLTAGE		230V AC	
DIMMABLE		NO	
POWER		7 W	
IP CLASS		IP54	
INSULATION CLASS		I	
ARTICLE NØ.			
STILO WALL BLACK 230V		3400	
MOUNT PLATE STILO WALL		9030	

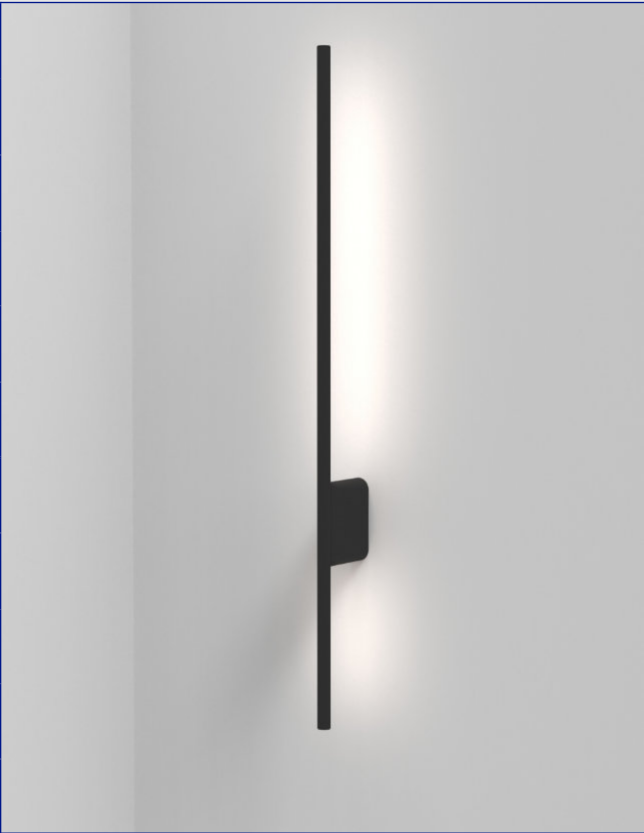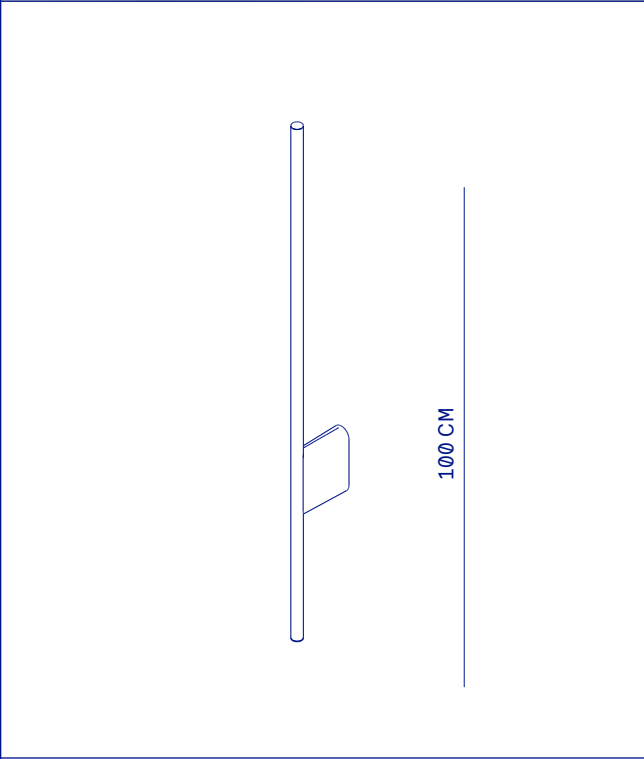

STILO WALL

WALL VECTOR PIVOT

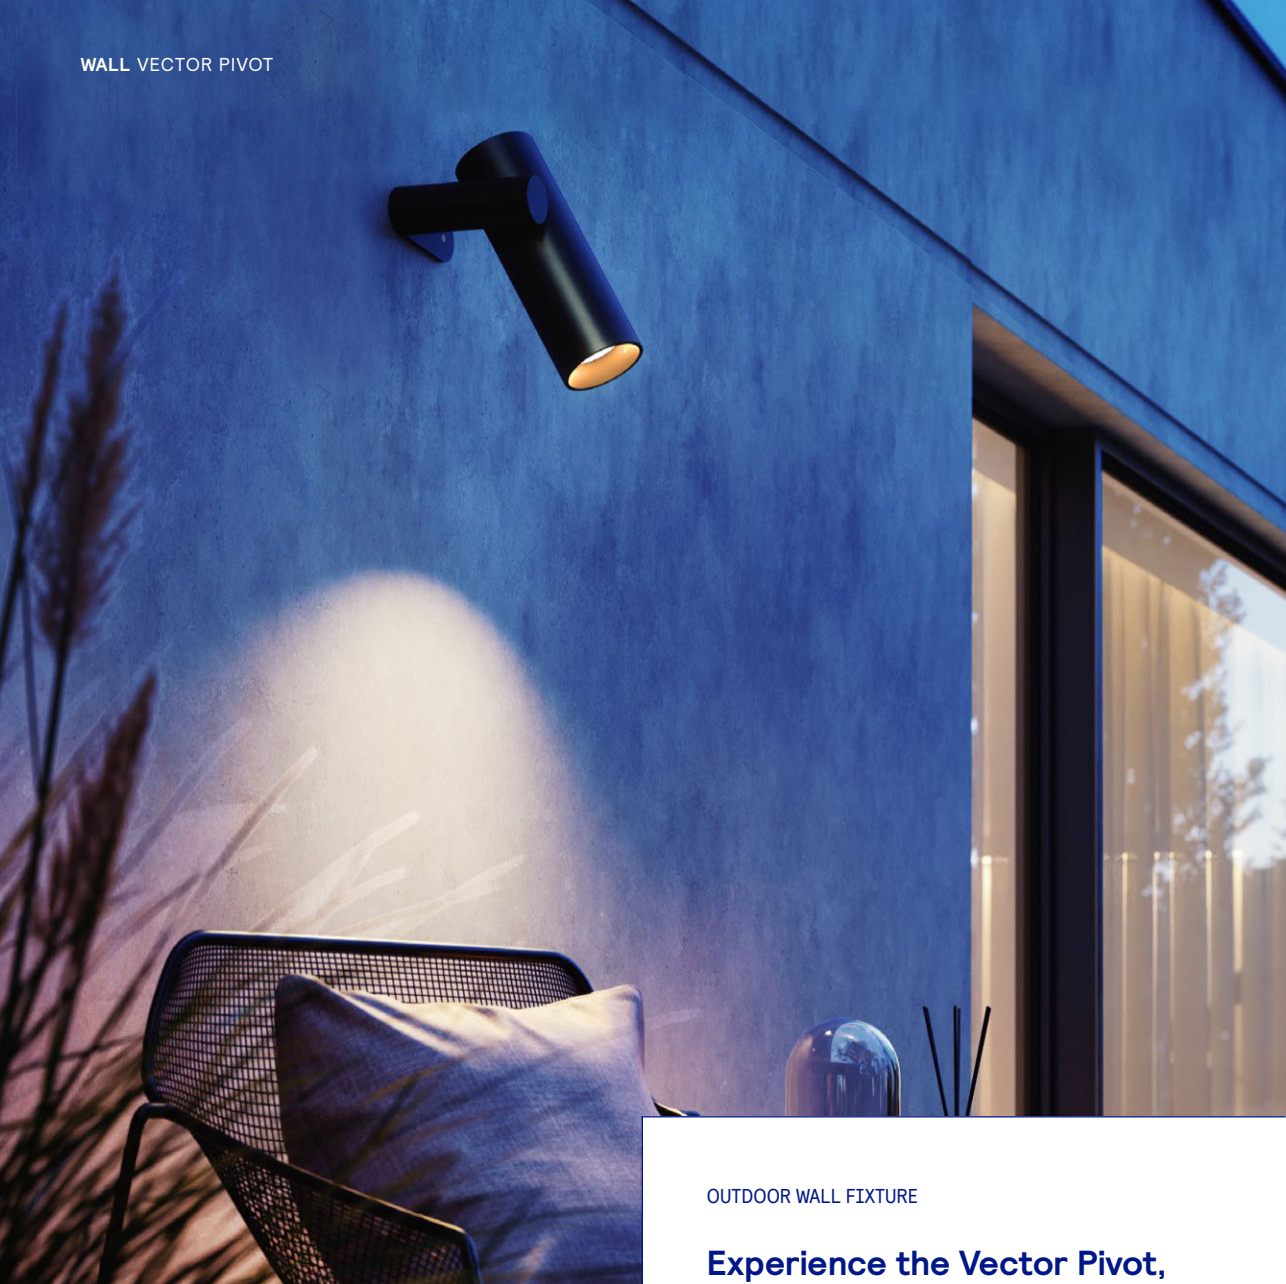


vector pivot

OUTDOOR WALL FIXTURE

Experience the Vector Pivot, combining a powerful light source with a stepless adjustable lamp for ultimate versatility. Its minimalist design ensures seamless integration into any space, offering both elegance and functionality.

DESIGN: MICHEL CORNELISSEN

SPECIFICATIONS		VECTOR PIVOT	
LIGHTSOURCE		LUXEON COB	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		1400 LM	
OPTIC		25° FROSTED	
RATED VOLTAGE		230V AC	
DIMMABLE		TRIAC	
POWER		12 W	
IP CLASS		IP54	
INSULATION CLASS		I	
ARTICLE NØ.		BLACK	
VECTOR PIVOT 230V		2412	

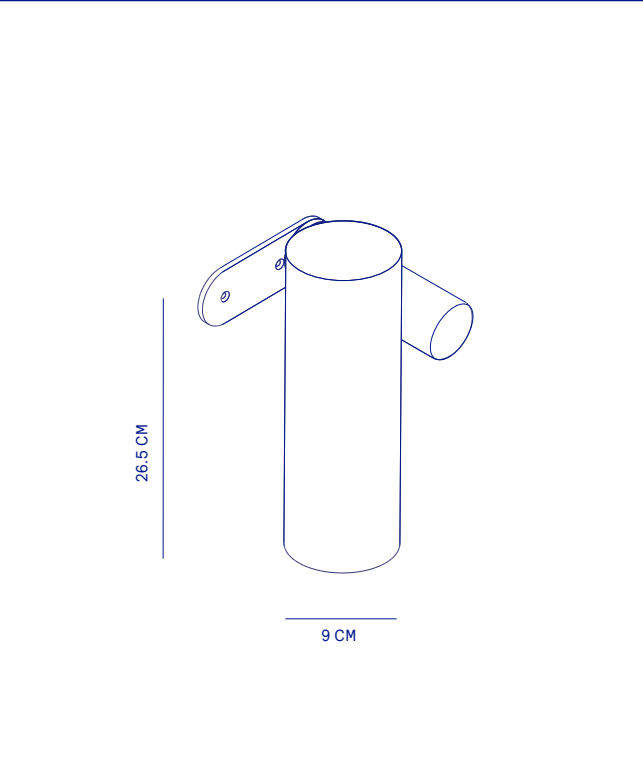

VECTOR PIVOT

WALL VECTOR WALL




vector wall

OUTDOOR WALL FIXTURE

**Magnitude and direction.
A powerful light source and
stepless adjustable lamp
define the Vector luminaire.
Minimalist design, perfect
to use.**

DESIGN: MICHIEL CORNELISSEN

SPECIFICATIONS		VECTOR WALL	
LIGHTSOURCE		LUXEON COB	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		1400 LM	
OPTIC		25° FROSTED	
RATED VOLTAGE		230V AC	
DIMMABLE		TRIAC	
POWER		12 W	
IP CLASS		IP54	
INSULATION CLASS		I	
ARTICLE NØ.		BLACK	
VECTOR WALL 230V		2413	

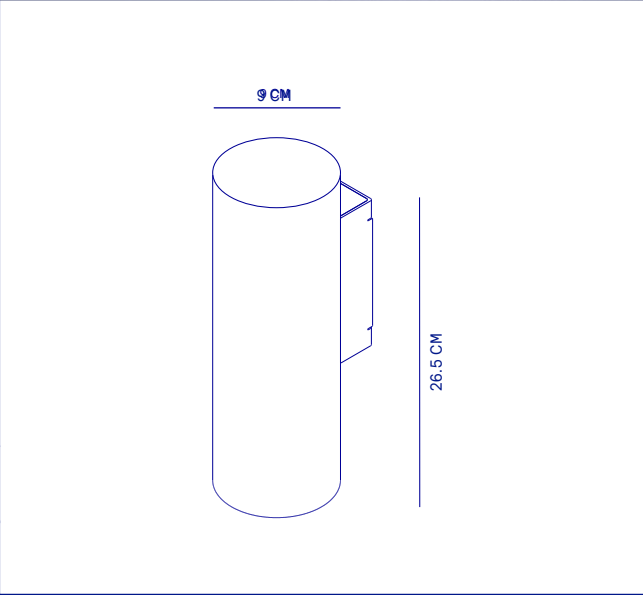

VECTOR WALL




cube ceiling

OUTDOOR CEILING FIXTURE

The Cube ceiling light boasts a robust aluminum housing. This fixture is available in a black, corten and white color with a polyester powder-coated finish, providing a stylish matte texture.

SPECIFICATIONS		CUBE CEILING		
LIGHTSOURCE	LUXEON REBEL			
COLOR TEMP.	2700 K			
LUMEN OUTPUT	800 LM			
OPTIC	25°			
RATED VOLTAGE	230V AC			
DIMMABLE	ON REQUEST			
POWER	10 W			
IP CLASS	IP54			
INSULATION CLASS	I			
ARTICLE NØ.		BLACK	CORTEN	WHITE
CUBE CEILING 230V		1323	1319	1329

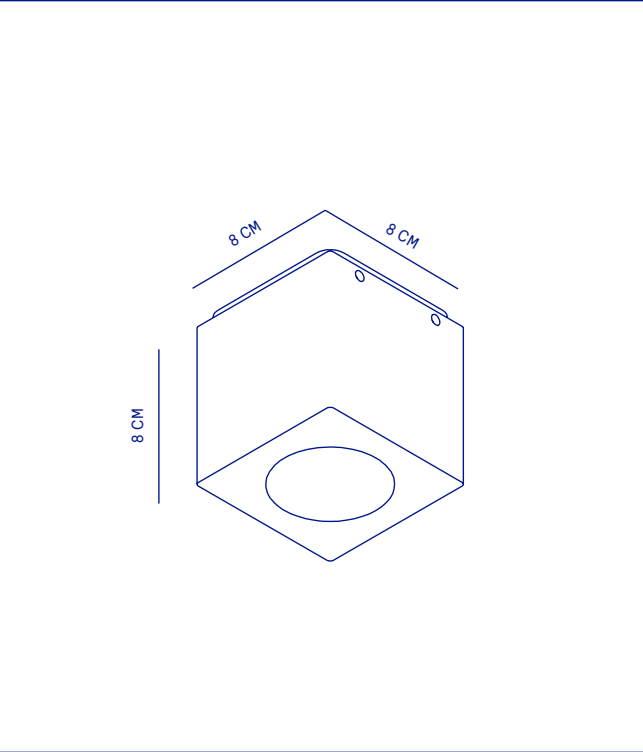

CUBE CEILING



CEILING VECTOR CEILING


vector ceiling


OUTDOOR CEILING FIXTURE

The Vector luminaire features a powerful light source. Its minimalist design ensures it is both elegant and easy to use, making it a perfect choice for any space.

DESIGN: MICHIEL CORNELISSEN

SPECIFICATIONS		VECTOR CEILING	
LIGHTSOURCE		LUXEON COB	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		1000 LM	
OPTIC		25° FROSTED	
RATED VOLTAGE		230V AC	
DIMMABLE		TRIAC	
POWER		9 W	
IP CLASS		IP54	
INSULATION CLASS		I	
ARTICLE NØ.		BLACK	
VECTOR CEILING 230V		2462	

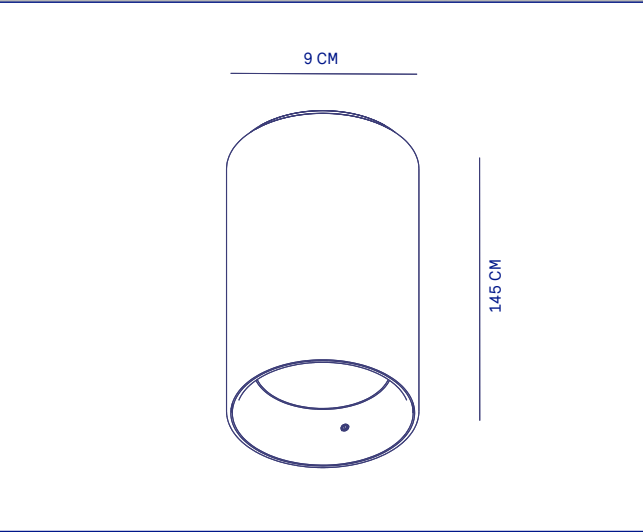

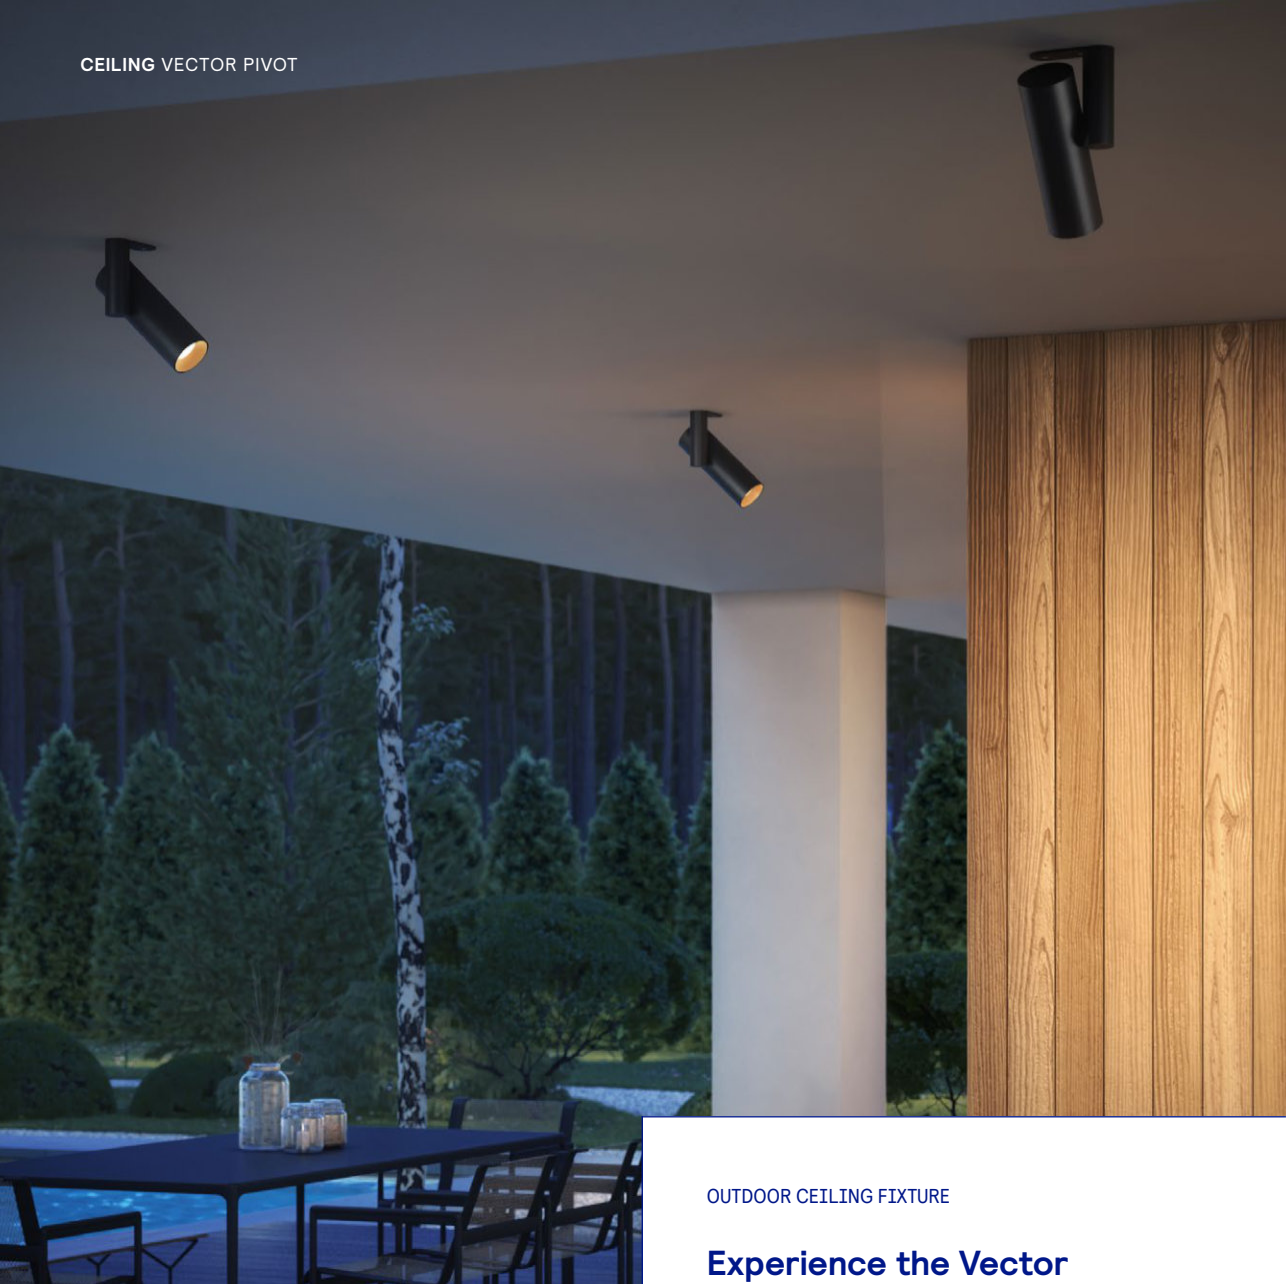


OUTDOOR CEILING FIXTURE

Experience the Vector pivot, combining a powerful light source with a stepless adjustable lamp for ultimate versatility. Its minimalist design ensures seamless integration into any space, offering both elegance and functionality.

DESIGN: MICHIEL CORNELISSEN

vector pivot

SPECIFICATIONS		VECTOR PIVOT	
LIGHTSOURCE		LUXEON COB	
COLOR TEMP.		2700 K	
LUMEN OUTPUT		1400 LM	
OPTIC		25° FROSTED	
RATED VOLTAGE		230V AC	
DIMMABLE		TRIAC	
POWER		12 W	
IP CLASS		IP54	
INSULATION CLASS		I	
ARTICLE NØ.		BLACK	
VECTOR PIVOT 230V		2412	

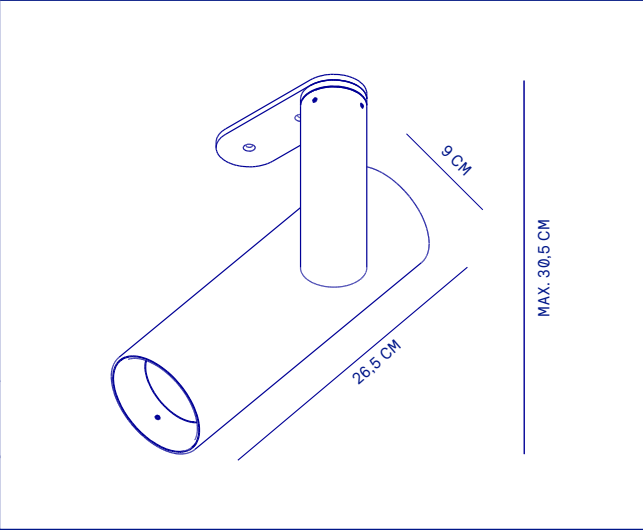

VECTOR PIVOT


IN-GROUND EOS

eos
asymmetric
frosted
spot

IN-GROUND SPOT

Efficient yet potent, this lamp provides exceptional performance. With its diverse options (asymmetric, frosted and spot), it caters to a variety of lighting needs and applications. The brushed stainless steel construction ensures a robust and enduring lighting solution.

SPECIFICATIONS		EOS
LIGHTSOURCE		CREE 2835
COLOR TEMP.		2700 K
LUMEN OUTPUT		130 LM / 65 LM / 130 LM
OPTIC ASYMMETRIC		25°
OPTIC FROSTED		FROSTED GLASS
OPTIC SPOT		25°
RATED VOLTAGE		24V DC
DIMMABLE		YES
POWER		1,0 W / 0,5 W / 1,0 W
IP CLASS		IP67
INSULATION CLASS		III
CABLE		40 CM



EOS ASYMMETRIC 24V




EOS FROSTED 24V



EOS SPOT 24V

INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

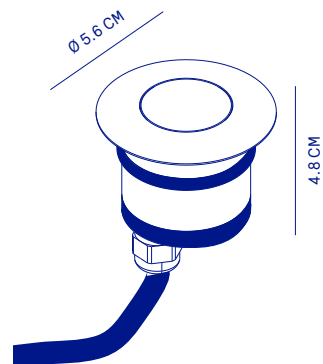

EOS ASYMMETRIC 24V

3120

EOS FROSTED 24V

3130

EOS SPOT 24V

3110

GROUND TUBE EOS

9026



IN-GROUND SELENE

sylene

asymmetric
narrow
wide

IN-GROUND SPOT


The key features of Sylene are robustness, durability, and comfort. These features ensure that Sylene is a reliable and long-lasting lighting solution while providing a comfortable experience for users. Additionally, the product offers different versions (asymmetric, narrow and wide) to cater to various lighting needs and applications.

SPECIFICATIONS	SELENE
LIGHTSOURCE	CREE 2835
COLOR TEMP.	2700 K
LUMEN	535 LM
OPTIC ASYMMETRIC	85x42°
OPTIC NARROW	30°
OPTIC WIDE	85°
RATED VOLTAGE	24V DC
DIMMABLE	YES
POWER	4,3 W
IP CLASS	IP68
IK CLASS	IK07
INSULATION CLASS	III
CABLE	0,4 M (NEOPRENE)

INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

SELENE ASYMMETRIC 24V	3015
SELENE NARROW 24V	3013
SELENE WIDE 24V	3011
GROUND TUBE SELENE	9025




SELENE ASYMMETRIC 24V




SELENE NARROW 24V







SELENE WIDE 24V

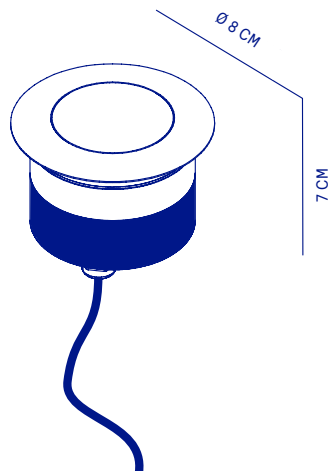

MOUNTS

<div><div>GROUND SPIKE BLADE</div><div>To be used for: > pg 48 BLADE</div></div>		
GROUND SPIKE BLADE	9016	
<div><div>GROUND SPIKE CUBIQ POLE</div><div>To be used for: > pg 15 CUBIQ POLE</div></div>		
GROUND SPIKE CUBE POLE	9019	
<div><div>GROUND SPIKE EYE</div><div>To be used for: > pg 52 EYE</div></div>		
GROUND SPIKE EYE / EYE FOCUS	9017	
<div><div>GROUND SPIKE RAY</div><div>To be used for: > pg 56 RAY</div></div>		
GROUND SPIKE RAY	9018	

<div>GROUND SPIKE TORCH</div> <div>To be used for: > pg 62 TORCH</div>	
<div>GROUND SPIKE TORCH</div> <div>9010</div>	
<div>GROUND SPIKE VECTOR POLE</div> <div>To be used for: > pg 66 VECTORPOLE</div>	
<div>GROUND SPIKE VECTOR POLE</div> <div>9015</div>	
<div>GROUND TUBE EOS</div> <div>To be used for: > pg 84 EOS</div>	
<div>GROUND TUBE EOS</div> <div>9026</div>	
<div>GROUND TUBE SELENE</div> <div>To be used for: > pg 86 SELENE</div>	
<div>GROUND TUBE SELENE</div> <div>9025</div>	
<div>MOUNT PLATE EDDY</div> <div>To be used for: > pg 41 EDDY</div>	
<div>MOUNT PLATE EDDY BLACK</div> <div>9032</div>	
<div>MOUNT PLATE EDDY CORTEN</div> <div>9033</div>	

DX-CONNECT


Simple / Solid / Waterproof

DX-connect is the perfect solution for installing 24V fixtures in the garden; it is safe, easy to work with, and provides the most sustainable installation. Just 3 components are needed for a complete installation: Cable, Connector and Power supply.

Installation guidelines

DX Cable 2×1 is suitable for cable lengths of up to 40 meters between the fixture and the power supply.

DX Cable 2×2,5 is suitable for cable lengths of up to 100 meters between the fixture and the power supply.

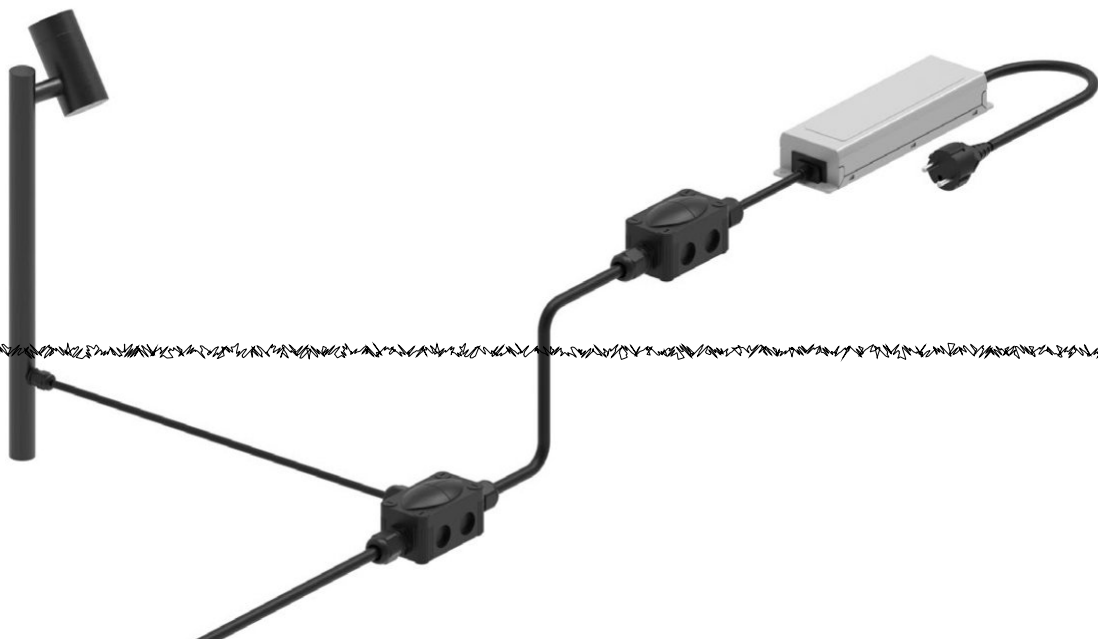

<div>DX CABLE</div> <div>Durable, waterproof 24V installation cable, designed for both outdoor and in-ground use.</div>	
DX-CABLE 2X1 50M	9062
DX-CABLE 2X2,5 50M	9070



DX-CABLE 2X2,5 | 50M

<div>DX-CONNECTOR</div> <div>The DX connector consists of three items: Connector Box: Designed for reliable in-line or junction connections. Connector Resin: Ensures a waterproof seal when applied to the connector box. Sufficient to pot up to four connector boxes. Connector Set: A practical kit that includes 4 connector boxes and the necessary resin.</div>	
DX-CONNECTOR BOX	9051
DX-CONNECTOR RESIN	9081
DX-CONNECTOR SET	9082



DX-CONNECTOR BOX

<div>DX-POWER SUPPLY</div> <div>Experience easy installation with our Euro plug power supplies. To operate a maximum of 10 fixtures per power supply. Available control options: On-off, DALI dimmable, or smart lighting control via Casambi.</div>	
DX-POWERSUPPLY ON-OFF	9139
DX-POWERSUPPLY DALI	9135




DX-POWERSUPPLY ON-OFF

230V MAINS

The power supply kit is the ideal solution for connecting 24V fixtures to a 230V ground cable in the garden.

Visit our website for
more information and
installation guidelines:
WWW.DEXTERLIGHTING.NL

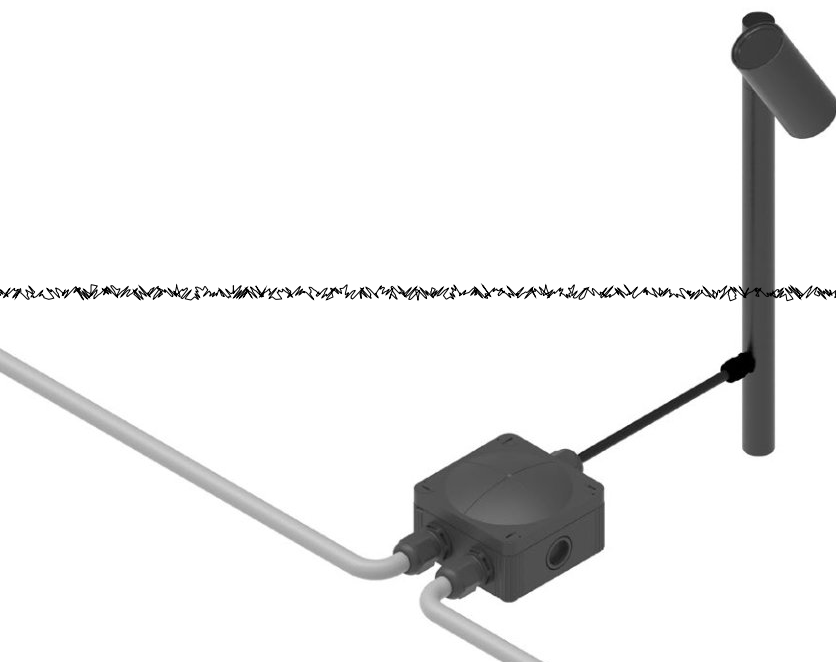

POWER SUPPLY KIT

complete kit for installing Dexter 24V
luminaires to a 230V ground cable, featuring
PU-resin for a waterproof and durable
inground installation. The kit includes all
essential components: a 15W DC power
supply, terminals, resin, and a junction box.



MATERIALS & COLORS

The material, colors and surface treatments are carefully selected and applied for each model to obtain the quality that outdoor lighting requires. Dexter luminaires are available in either stainless steel, anodised aluminium or powder coated aluminium.



POWDER COATED ALUMINIUM


Pre treatment of the aluminium parts is essential to obtain an enduring protection. All powder coated parts are pretreated with a 7 baths series. For its excellent weathering resistance and mechanical properties, we use the architectural polyester quality Alesta® AP powder coatings.

With the corten color, each fixture is unique and will have its own distinctive appearance


- > AVAILABLE COLORS
black, corten, olive green, white




> black

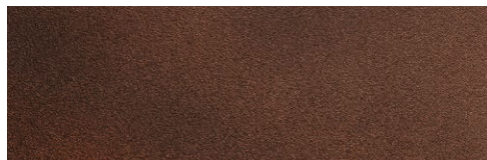

> corten

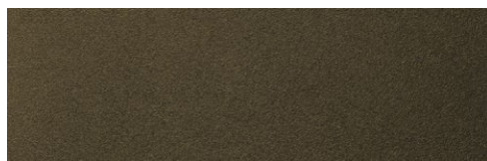


> olive green

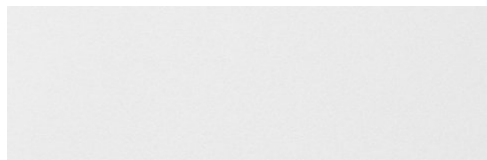

> white

ANODISED ALUMINIUM


For the aluminium anodised luminaires all aluminium parts are electrolytic anodised and sealed to increase the resistance to corrosion and wear. To obtain a high UV and chemical resistance the parts are electrolytic colored.

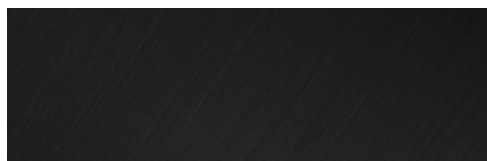

> anodised black

STAINLESS STEEL

All stainless steel luminaires are made out of the 316 grade, also referred to as marine grade stainless. The surface finish is matt brushing.

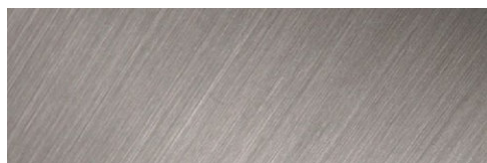

> stainless steel

DEXTER 2024

CONCEPT & DESIGN

hatsandtales.nl

PHOTOGRAPHY

portraits & products

rozaschous.nl

3D WORLDS

casestudyhomes.com

COPYWRITING

hartvoorverhalen.nl

PRINTING

Tuijtel.com

CONTACT

Dexter Design BV

Schiemond 20

3024 EE Rotterdam

The Netherlands

+31 10 276 25 17

info@dexterlighting.nl

www.dexterlighting.nl

For the latest edition of our catalogue
visit our website www.dexterlighting.nl

All information in this catalogue is
provided for information purposes only.
Dexter Design BV is not responsible
for printing errors, wrong dimensions,
descriptions or technical data. Dexter
Design BV reserves the right to amend all
products herein detailed, at any time and
without prior notice.





DEXTERLIGHTING.NL